

Note: Further refinements to this section are also anticipated during the Public DRAFT GSP review process.

SIERRA VALLEY GSP CHAPTER 3 SUSTAINABLE MANAGEMENT CRITERIA

Table of Contents

3	Sustainable Management Criteria	4
3.1	Introduction to Sustainable Management Criteria and Definition of Terms	4
3.2	Sustainability Goal (Reg. § 354.24)	5
3.3	Sustainable Management Criteria	6
3.3.1	Groundwater Elevation	6
3.3.2	Groundwater Storage.....	18
3.3.3	Depletion of Interconnected Surface Waters	19
3.3.4	Degraded Groundwater Quality	24
3.3.5	Land Subsidence.....	34
3.4	Monitoring Networks (Reg. § 354.26)	39
3.4.1	Monitoring Networks in the Subbasin.....	41
3.4.2	Assessment and Improvement of the Monitoring Network (23 CCR § 354.38).....	57
3.4.3	Reporting Monitoring Data to the Department (23 CCR § 354.40, § 352.4).....	58
3.5	References	60

Table of Figures

Figure 3.3.1-1.	Analysis of Historical Groundwater Levels at the Representative Monitoring Points and the Minimum Thresholds and Measurable Objectives [figure may be modified to improve readability]	12
Figure 3.3.1-2.	Minimum thresholds do not substantially lower groundwater elevations beyond the lowest recorded values (Fall 2015) and maintain elevations above historic lows near ISW.[legend to added to further clarify map features]	12
Figure 3.3.1-3.	Minimum Thresholds in elevation above mean sea level (left) and below land surface (right) for the Representative Monitoring Points (duplicate labels indicate nested monitoring wells)	16
Figure 3.3.1-4.	Measurable Objectives in elevation above mean sea level (left) and below land surface (right) for the Representative Monitoring Points (duplicate labels indicate shallow and deep wells at the same location)	17
Figure 3.3.1-5	Groundwater Level Sustainable Management Criteria Flow Chart	18
Figure 3.3.3-1.	Proposed Representative Monitoring Points for ISW and GDEs	22

Figure 3.3.3-2.	MTs at ISW RMPs in terms of elevation above mean sea level (left) and depth below land surface (right). Faults are shown as dark green lines. ISW classification (Chapter 2) is shown for data gaps (orange), disconnected reaches (red), and ISW (blue).	23
Figure 3.3.3-3.	MOs at ISW RMPs in terms of elevation above mean sea level (left) and depth below land surface (right). Faults are shown as dark green lines. ISW classification (Chapter 2) is shown for data gaps (orange), disconnected reaches (red), and ISW (blue).	24
Figure 3.3.4-1.	Degraded water quality rulers for the constituents of concern in the Sierra Valley Subbasin (Measurable objectives are provided as an example and are specific to each well in the monitoring network)	31
Figure 3.3.4-2.	Degraded water quality sustainable management criteria flow chart	34
Figure 3.3.5-1	Minimum (left) and maximum (right) range of land subsidence implied by the change in groundwater level between recent historic lows (fall 2015) and groundwater level MTs.	38
Figure 3.4.1-1.	RMPs for the Groundwater Level Monitoring Network (Network coverage is depicted with blue, circular 15.0 square mile buffers around each monitoring point that show the 82% lateral coverage of the network).....	44
Figure 3.4.1-2.	Potential Wells for Inclusion in the Groundwater Quality Monitoring Network.....	50
Figure 3.4.1-3.	Existing and proposed ISW monitoring locations for flow, stage, and groundwater level are shown alongside ISW characterization at prominent surface water bodies	55

Table of Tables

Table 3.3.1-1.	Representative Monitoring Point (RMP) Elevations and Minimum Thresholds (MTs) and Measurable Objectives (MOs).....	15
Table 3.3.3-1.	MTs and MOs for select RMPs associated with GDEs and ISW.....	21
Table 3.3.4-1.	Constituents of Concern and the Associated Maximum Thresholds and Triggers	30
Table 3.3.4-2.	Potential Groundwater Quality Monitoring Wells and Associated Measurable Objectives	33
Table 3.4.1-1.	Summary of monitoring networks, metrics, and number of sites for sustainability indicators	41
Table 3.4.1-2.	Potential GAMA Wells to be added to the Groundwater Quality Monitoring Network (Measurement period 1990-2020).....	48
Table 3.4.1-3.	Proposed stream stage gages and coupled wells to monitor ISW depletion	53
Table 3.4.1-4.	Proposed streamflow gages to monitor ISW depletion.....	54



Sierra Valley
Groundwater
Management District

List of Appendices

Appendix 3-1 Well Impact Analysis

Appendix 3-2 Historic Groundwater Levels

Appendix 3-3 Groundwater Dependent Ecosystem Assessment

3 Sustainable Management Criteria

3.1 Introduction to Sustainable Management Criteria and Definition of Terms

This section establishes the current and desired future SV Subbasin conditions through evaluation of the six sustainability indicators and outlines the analyses and processes used to define sustainable management criteria (SMC) for each sustainability indicator. Undesirable results, minimum thresholds (MTs), measurable objectives (MOs), and interim milestones (IMs) are defined for each sustainability indicator with respect to the quantification and avoidance of potential impacts on beneficial groundwater uses and users.

The following terms, defined below, are described for the SV Subbasin in the following sections.

Sustainability Goal: The overarching, qualitative goal for the Subbasin with respect to maintaining or improving groundwater conditions and ensuring the avoidance of undesirable results.

Sustainability Indicators (SI): The six categories of impacts to groundwater conditions identified by SGMA: lowering groundwater levels, reduction of groundwater storage, seawater intrusion, degraded groundwater quality, land subsidence, and surface water depletion. Undesirable results are defined as impacts determined as significant and unreasonable by the GSAs. Importantly, seawater intrusion is not applicable to the SV Subbasin and thus not discussed.

Sustainable Management Criteria (SMC): Minimum thresholds, measurable objectives, and interim milestones are quantitative criteria measured at a network of representative monitoring points (RMPs) that provide adequate coverage such that Undesirable Results, consistent with the sustainability goal, are avoided during the implementation period (through 2042) and beyond (after 2042).

Undesirable Results: Conditions, defined under SGMA as: “... one or more of the following effects to Sustainability Indicators caused by groundwater conditions occurring throughout a basin:

1. *Chronic lowering of groundwater levels indicating a significant and unreasonable depletion of supply if continued over the planning and implementation horizon...*
2. *Significant and unreasonable reduction of groundwater storage.*
3. *Significant and unreasonable seawater intrusion.*
4. *Significant and unreasonable degraded water quality, including the migration of contaminant plumes that impair water supplies.*
5. *Significant and unreasonable land subsidence that substantially interferes with surface land uses.*
6. *Depletions of interconnected surface water that have significant and unreasonable adverse impacts on beneficial uses of the surface water.”*

Minimum Thresholds (MTs): Quantitative values measured at RMPs that, if reached in accordance with the “Identification of Undesirable Results”, define the occurrence of an undesirable result. Thus, the management goal is to avoid groundwater conditions that exceed

41 MTs defined by this GSP. The term “minimum threshold” is predominantly used in SGMA
42 regulations and is applied to most sustainability indicators. The term “maximum threshold” is
43 equivalent but is used for sustainability indicators with a defined maximum limit (e.g.,
44 groundwater quality).

45 **Measurable Objectives (MOs):** Quantitative values measured at RMPs that maintain or
46 improve groundwater conditions and, if reached, represent the attainment of the basin’s
47 Sustainability Goal.

48 **Interim Milestones (IMs):** Quantitative periodic goals (defined every five years) that measure
49 progress towards the basin’s Sustainability Goal defined by the MOs.

50 **Representative Monitoring Points (RMPs):** For each SMC, RMPs are a sub-component of the
51 overall monitoring network which collectively “represent” hydrologic conditions that permit the
52 evaluation of sustainable groundwater management. SMC are measured at RMPs.

53 **3.2 Sustainability Goal (Reg. § 354.24)**

54 As required by SGMA, the sustainability goal for the Basin was created through input from all
55 the stakeholders who participated in the GSP planning effort. The goal fulfills the regulations put
56 forward by the DWR to develop a sustainability goal that “...culminates in the absence of
57 undesirable results within 20 years....” (23 CCR § 354.24).

58 The GSAs strive for equal access to groundwater for all current and future members of the
59 Basin and that the water will be put to beneficial uses while being able to sustainably meet
60 demand and avoid any undesirable results.

61 The overarching sustainability goal for groundwater management in the Sierra Valley Subbasin
62 is:

63 **To manage groundwater resources in a manner that best supports the long-term health**
64 **of the people, the environment, and the economy of Sierra Valley into the future by**
65 **avoiding significant and unreasonable impacts to environmental, domestic, agricultural,**
66 **and industrial beneficial uses and users of groundwater.**

67 The objective of this goal is to avoid significant and unreasonable impacts to the environmental,
68 agricultural, domestic, industrial, and community beneficial uses and users of groundwater in
69 Sierra Valley.

70 The sustainability goal incorporates managing groundwater conditions for each of the applicable
71 sustainability indicators in the Subbasin so that:

- 72 • Groundwater elevations and groundwater storage do not significantly decline below their
73 historically measured range (i.e., 2015 levels), thereby protecting the existing well
74 infrastructure from impacts, protecting groundwater-dependent ecosystems, and
75 avoiding significant streamflow depletion due to groundwater pumping.
- 76 • Groundwater quality is suitable for the beneficial uses in the SV Subbasin and is not
77 significantly or unreasonably degraded.
- 78 • Significant and unreasonable land subsidence is prevented in the SV Subbasin.
79 Infrastructure (e.g., roads, foundations, water conveyances, and well casings) and
80 agriculture production in the SV Subbasin remain safe from land subsidence.
- 81 • Significant and undesirable depletions of interconnected surface water (ISW) due to
82 groundwater pumping are avoided by maintaining hydraulic gradients near ISW and

83 through projects and management actions that bolster groundwater levels. Maintaining
84 the groundwater surface water connection will also support maintenance of GDEs to
85 enhance the presence of wildlife and support wetlands for migratory and local birds.

- 86 • The GSA groundwater management is effectively integrated with other watershed and
87 land use planning activities through collaborations and partnerships with local, state, and
88 federal agencies, private landowners, and other organizations, to achieve the broader
89 “watershed goal” of adequate groundwater recharge and sufficient surface water flows to
90 sustain healthy ecosystem functions.

91 The Sustainability Goal will be achieved by quantifying and minimizing potential impacts to
92 domestic, residential, agricultural, industrial, and environmental beneficial users. Scientifically
93 informed Sustainable Management Criteria will be developed around these assessments that
94 avoid significant and unreasonable impacts to beneficial uses and users of groundwater. Finally,
95 the GSAs will implement projects and management actions, monitor Sustainable Management
96 Criteria, and iteratively refine the GSP so that the Sustainability Goal is achieved during Plan
97 implementation and is maintained afterward.

98 **3.3 Sustainable Management Criteria**

99 **3.3.1 Groundwater Elevation**

100 **3.3.1.1 Undesirable Results**

101 Chronic lowering of groundwater levels is considered significant and unreasonable when a
102 significant number of private, agricultural, industrial, or municipal production wells cannot pump
103 enough groundwater to supply beneficial uses. SGMA defines undesirable results related to
104 groundwater levels as chronic lowering of groundwater levels indicating a significant and
105 unreasonable depletion of supply if continued over the planning and implementation horizon.
106 What constitutes ‘significant and unreasonable’ for lowering of groundwater levels was
107 evaluated for the Sierra Valley Subbasin and used to assign the criteria discussed in this
108 section. The lowering of water levels during a period of drought is not the same as (i.e., does
109 not constitute) “chronic” lowering of groundwater levels if extractions and groundwater recharge
110 are managed as necessary to ensure that reductions in groundwater levels or storage during
111 droughts are offset by increases in groundwater levels or storage during other periods.

112 Potential impacts and the extent to which they are considered significant and unreasonable
113 were determined by the GSAs with input by technical advisors and members of the public.
114 During development of the GSP, potential undesirable results identified included:

- 115 ▪ Domestic, public, or agricultural wells going dry.
- 116 ▪ Reduction in the pumping capacity of existing wells.
- 117 ▪ Increase in pumping costs due to greater lift.
- 118 ▪ Need for deeper well installations or lowering of pumps.
- 119 ▪ Financial burden to local agricultural interests.
- 120 ▪ Land subsidence.
- 121 ▪ Adverse impacts to environmental uses and users, including reduced interconnected
122 surface water (ISW) or decline of groundwater-dependent ecosystems (GDEs).

123 To the best of our knowledge, undesirable results occurring as the result of groundwater level
124 declines have been minor and manageable within the Subbasin.

125 *3.3.1.1.1 Identification of Undesirable Results*

126 **Operationally, an undesirable result for the groundwater level SMC would occur when**
127 **more than 25% (10 or more of the 37 wells) of RMPs for groundwater levels in the**
128 **Subbasin fall below their MT for two consecutive years. *[This value maybe be modified***
129 ***based on stakeholder input]***

130 No further federal, state, or local standards exist for chronic lowering of groundwater elevations.

131 *3.3.1.1.2 Potential Causes of Undesirable Results*

132 Potential causes of Undesirable Results related to Chronic Lowering of Groundwater Levels
133 include substantial pumping and/or reduced recharge.

134 The current primary use of groundwater in the SV Subbasin is for agriculture, thus increased
135 agricultural groundwater pumping could occur if water use per acre on irrigated land increases
136 or if new land is put into agricultural production. Although groundwater pumping for domestic
137 uses is relatively small, housing development pressure within the Subbasin could lead to an
138 increase in groundwater use.

139 Reduced recharge could occur due to increased agricultural irrigation efficiency, due to
140 development, and/or due to climate change that could result in decreased precipitation,
141 decreased surface water inflows from contributing watersheds, reduced cross-boundary flows,
142 and/or increased evapotranspiration (ET).

143 Climate change is expected to increase average annual temperatures, reduce snowpack, and
144 intensify rainfall events while also extending dry periods. During prolonged dry periods, reduced
145 snowpack and higher temperatures may decrease both the total runoff from snowmelt, and the
146 period over which this runoff occurs. The reduction in runoff from the surrounding uplands can
147 reduce stream recharge to the Subbasin, which may reduce groundwater levels provided
148 constant extraction (**Chapter 2.2.3 Water Budget**). However, during more intense wet periods
149 that may occur as a result of climate change, increased recharge and runoff in the surrounding
150 uplands may have the opposite effect and increase groundwater levels.

151 **3.3.1.2 Effects on Beneficial Uses and Users**

152 Undesirable results would prevent private, agricultural, industrial, or municipal production wells
153 from supplying groundwater to meet their water demands. Due to the degree of groundwater
154 level decline, and relative depth of wells compared to shallower groundwater levels, chronic well
155 outages are not expected in the SV Subbasin. These qualitative assessments are supported by
156 quantitative well impact analysis (see Appendix 3-1) that suggests minimal impacts at proposed
157 MTs.

158 The following provides greater detail regarding the potential impact of decreased groundwater
159 levels on several major classes of beneficial users:

- 160 • **Municipal Drinking Water Users:** Undesirable results due to declining groundwater
161 levels can adversely affect current and projected municipal users, causing increased
162 costs for potable water supplies, and the potential for rationing.
- 163 • **Rural and/or Agricultural Residential Drinking Water Users:** Seasonal low
164 groundwater levels can cause shallow domestic and stock wells to go dry, which may
165 cause seasonal well outages and restrict water access during periods of highest crop or
166 pasture water demand.
- 167 • **Agricultural Users:** Excessive seasonal lowering of groundwater levels could increase
168 pumping costs or require changes in irrigation practices or crop choice. The cost



169 increases associated with these impacts may cause adverse effects to property values
170 and the regional economy.

- 171 • **Environmental Uses:** Lowering of groundwater levels may result in significant and
172 unreasonable reduction of groundwater flow toward streams and impacts to groundwater
173 dependent ecosystems. This would adversely affect ecosystem functions related to
174 interconnected surface water flows and stream temperature and could affect water
175 available for plants, fish, and wildlife.

176 **3.3.1.3 Relationship to Other Sustainability Indicators**

177 Minimum thresholds for groundwater elevation were designed to be consistent with the
178 avoidance of undesirable results for the other sustainability indicators. Groundwater levels are
179 directly related to groundwater storage, land subsidence, ISW depletion, and groundwater-
180 dependent ecosystems. The relationship between groundwater level MTs, and the MTs for other
181 sustainability indicators are discussed below.

- 182 • **Groundwater Storage:** Groundwater level is a one-dimensional representation of
183 groundwater storage (three-dimensional). Lowering groundwater levels generally
184 indicate groundwater storage reduction.
- 185 • **Depletions of Interconnected Surface Water:** Groundwater level defines the
186 steepness of the hydraulic gradient between ISW and saturated groundwater, and hence
187 the rate, volume, and direction of ISW depletion. Declining groundwater levels can result
188 in reduced in-stream flows, and negatively impact springs and seeps.
- 189 • **Seawater Intrusion:** This sustainability indicator is not applicable in the SV Subbasin.
- 190 • **Groundwater Quality:** As is the case of depletions of ISW, lowering groundwater levels
191 may alter hydraulic gradients and therefore change groundwater flow paths and cause
192 contaminant migration to previously unimpacted areas.
- 193 • **Subsidence:** Groundwater level MTs are sufficiently close to historic groundwater
194 levels, and although land subsidence is observed in the Subbasin, it is not significant
195 and unreasonable. Thus, the occurrence of significant subsidence resulting from
196 lowering groundwater levels to MTs is not anticipated.

197 **3.3.1.4 Information and Methodology Used to Establish Minimum Thresholds and** 198 **Measurable Objectives, and Interim Milestones**

199 Groundwater level SMC represent the analysis of best-available data at the time of writing and
200 will be evaluated in subsequent plan updates. In establishing MTs for groundwater level decline,
201 the following information was considered:

- 202 • Feedback about groundwater level decline concerns from stakeholders.
- 203 • An assessment of available historical and current groundwater level data from
204 monitoring wells in the Subbasin.
- 205 • An assessment of trends in groundwater level at selected wells with adequate data to
206 perform the assessment.
- 207 • Potential impact to ISW, GDEs, and other unidentified areas.
- 208 • Input from stakeholders resulting from the consideration of the above information in the
209 form of recommendations regarding MTs and associated management actions.

210 MTs for groundwater levels were then determined by historical analysis of groundwater level
211 monitoring data from January 2000 to June 2021, setting preliminary SMC, evaluating the
212 impact of those SMC on beneficial users of groundwater (e.g., ISW, GDEs, wells), and iterating
213 to determine the projected SMC that would avoid significant and unreasonable impacts.

214 Importantly, undesirable results due to excessive lowering of groundwater levels have been
215 minor and manageable in the SV Subbasin, which implies that groundwater levels near
216 historical lows should not cause undesirable results.

217 To establish SMC a three-step process was followed at each representative monitoring point
218 (RMP). First, the January 2020 to current trend of groundwater levels were linearly projected to
219 January 2032, corresponding to 10 years after GSP submission. Second, the projected
220 groundwater level was compared to the lowest groundwater elevation observed after
221 January 2015. Third, the minimum of the values compared in step two were then reduced by a
222 buffer equal to 10% of the January 2000 to current range of groundwater levels observed at
223 each monitoring point to arrive at the MT. MTs were then rounded down to the nearest integer
224 to ease interpretability. RMPs that show an increase in groundwater level use the observed
225 minimum level as the MT. These SMC effectively give the Subbasin time to respond to
226 corrective action. The 10% buffer allows for operational flexibility to account for potential
227 extreme climate conditions and to accommodate practicable triggers. The analysis for the RMPs
228 is presented in **Figure 3.3.1-1**. On the figure, the measured groundwater levels are black solid
229 lines, the MT is represented as a red horizontal solid line, the MO is shown as a blue horizontal
230 solid line, and the IMs are grey horizontal dashed lines. The two vertical green dashed lines on
231 each sub-plot demark January 2015 and January 2032. Note that all subplots share the same
232 x-axis, but have different y-axis scales. RMPs capture the shallow and deep zones of the
233 aquifer.

234 Next, these MTs were assessed in terms of potential impact to various beneficial users of
235 groundwater including shallow wells (e.g., domestic, public, agricultural, and industrial),
236 groundwater dependent ecosystems, and interconnected surface water.

237 1. **Avoidance of impacts to shallow wells:** To estimate the impacts to shallow wells, a
238 simulated groundwater table generated from the groundwater level MTs was compared
239 to well completion report data. Assuming all MTs are simultaneously reached across the
240 basin – a theoretical worst case and unlikely scenario – only 6 to 10 domestic wells (2%)
241 are impacted, and no other well types are impacted. The range of uncertainty is primarily
242 driven by uncertainty in the well retirement age, which controls the number of initially
243 active wells in the model. This finding is consistent with the fact that most wells, although
244 shallow in depth (e.g., domestic wells), are relatively deep compared to present-day
245 groundwater levels and groundwater level MTs. Thus, the MTs presented herein protect
246 shallow wells. A detailed discussion of the well impact analysis is presented in **Appendix**
247 **3-1**.

248 2. **Avoidance of impacts to GDEs:** *[this section may be modified to provide more*
249 *explanation of the analysis conducted]* MOs and MTs for each well were evaluated in
250 terms of their impact on GDEs. Where there were no GDEs within a 1-mile radius of the
251 monitoring point the MO and MT were not changed. Because there is no record of the
252 extent of GDEs through time, the Normalized Difference Vegetative Index (NDVI, also
253 discussed in Chapter 2) of mapped GDE polygons was used to assess the linkage
254 between groundwater elevation and GDE health. If a statistically significant relationship
255 exists between depth to groundwater and NDVI the potential impact of MO and MT
256 values was assessed for the monitoring well. For wells screened at more than one
257 depth, only the shallowest screening interval was used. The degree to which NDVI



258 recovered following water elevations close to the MT was investigated to ensure that
259 historical water elevations near the MT did not negatively impact the GDEs (see Chapter
260 2 and Appendix 3-3 for details on GDE NDVI). Where possible, MTs were adjusted to be
261 within the historical range of groundwater elevations so that the impact on GDEs was
262 known. For riverine GDEs, the MT was adjusted to within 10 ft of the ground to promote
263 ISW where reasonable. The results of this analysis are presented in Appendix 3-3 (GDE
264 Assessment).


265 Based on a review of historical NDVI and water surface elevation, MOs and MTs were
266 adjusted at 4 representative monitoring point (RMP) wells to conservatively limit impacts
267 to GDEs (RMP IDs 93, 209, 291, and 300; RMPs and their associated SMCs are listed
268 in Table 3.3.1-1, map with well locations to be added). The remainder of the wells either
269 had no GDEs within 1 mile of the RMP (9 of the RMPs), did not have a statistically
270 significant relationship between NDVI and groundwater elevation (15 of the RMPs, p-
271 value>0.05), had groundwater depths > 30 ft below ground surface (3 of the RMPs), or
272 had relatively robust NDVI at the MO and recovered following groundwater depths near
273 the MT. (7 of the 11 RMPs with p-value<0.05). In general, RMPs with a statistically
274 significant correlation between groundwater depth and NDVI had r-squared values
275 <0.25. The relatively low r-squared likely reflects controls on vegetation NDVI not
276 associated with groundwater (e.g., climate, soil moisture, and biotic factors). Low r-
277 squared may also reflect local heterogeneity in the aquifer and the resultant indirect
278 correlation between the depth of groundwater measured at the RMP. For example, an
279 aquitard may separate shallow groundwater used by the GDE from groundwater tapped
280 by the RMP well.

281
282 For RMP 93, groundwater elevations at or below the previous MT caused declines that
283 persisted for more than 1 year. The MT was raised by 1 ft to a groundwater elevation
284 above this threshold where impacts to NDVI did not persist. The MO was increased by 1
285 ft RMP 93 to more closely reflect the minimum groundwater elevation at which NDVI
286 reached its highest value (0.6). Because RMP 93 is adjacent to the large wetland in the
287 western portion of the basin, the MO and MT were conservatively adjusted to limit
288 impacts to this GDE, despite the large depth of the well.

289 For RMP 209 the MO was adjusted to be within 10 ft of the ground surface to support
290 ISW. For RMP 291 the MO and MT were adjusted by < 1ft. The MO was adjusted to 6 ft
291 below ground surface to reflect high groundwater levels in 2006, 2017, and 2019.
292 Finally, the MT was increased to 10ft below ground surface to support ISW. For RMP
293 300, the MT was adjusted to the 2010-2015 low value and the MO not changed. This
294 well only has groundwater data from 2005-present and more detailed monitoring of GDE
295 health relative to groundwater elevation will help to understand linkages between GDEs
296 and groundwater elevation at this site.

297 **3. Avoidance of impacts to ISW:** Groundwater level MTs near interconnected surface
298 water (ISW) are set no lower than historically observed low groundwater levels to
299 maintain hydraulic gradients and prevent ISW depletion that exceeds previously
300 experienced depletion (Section 3.3.3.4). The difference between Fall 2015 groundwater
301 levels and MTs varies by location in the basin, and ranges from 0 to 13 feet as displayed
302 on

303 **Figure N2: Groundwater level, storage, and ISW RMP locations. Each point is made slightly**
 304 **transparent to show overlapping points, which correspond to monitoring multiple depths at**
 305 **multi-completion wells.**

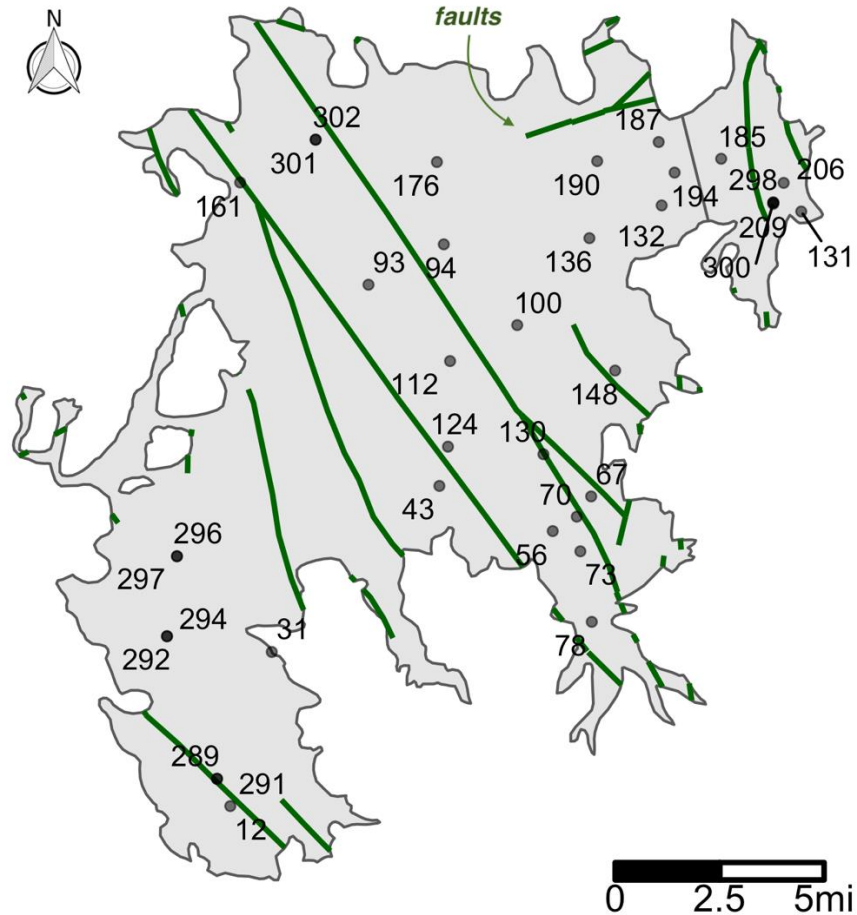

306

307 4. Figure 3.3.1-2. [protection of beneficial uses may also need to be mentioned here]

308 Next, measurable objectives (MOs) were defined as the average groundwater elevation
 309 observed after January 1, 2015, which correspond to present-day groundwater levels and imply
 310 a management goal to maintain these levels. MOs were rounded to the nearest integer to ease
 311 interpretability. Operational flexibility is defined as the difference between the MO and the MT.
 312 Interim milestones (IMs) were defined as regular five-year long intervals between the MT and
 313 MO at 2027, 2032, and 2037. The MO can be understood as the 4th and final IM. When the
 314 operational flexibility for and RMP is less than 3 feet, due to nearest-integer-rounding, one or
 315 more IMs will be equal to the MO.


316 3.3.1.4.1 Triggers [This value needs stakeholder input and may be modified based as a result]

317 The primary trigger for an initial investigation that may result in management actions will be if
 318 groundwater levels fall below historic lows in any individual RMP for more than two consecutive
 319 years – notably, this does not constitute an undesirable result, but warrants attention. A
 320 secondary trigger for management actions will be if 2% (~ 6 of ~ 300 domestic wells) of
 321 domestic well outage reports are received. This trigger value is based on findings that suggest

322 2% of domestic wells may be impacted assuming 100% of MTs across the entire basin are
 323 reached at the same time (Appendix 3-1). Hence, the definition for the identification of
 324 undesirable results occur (when 25% of RMPs reach their MT) is conservative with respect to
 325 impacts to wells. If either of these triggers occur, the GSAs will investigate and reassess SMC
 326 suitability and may use management actions to proactively avoid the occurrence of undesirable
 327 results.

328


329 **Figure N: Analysis of Historical Groundwater Levels and SMC at one example Representative**
 330 **Monitoring Point (RMP ID = 100). Please see Appendix 3-2 for all hydrographs.**

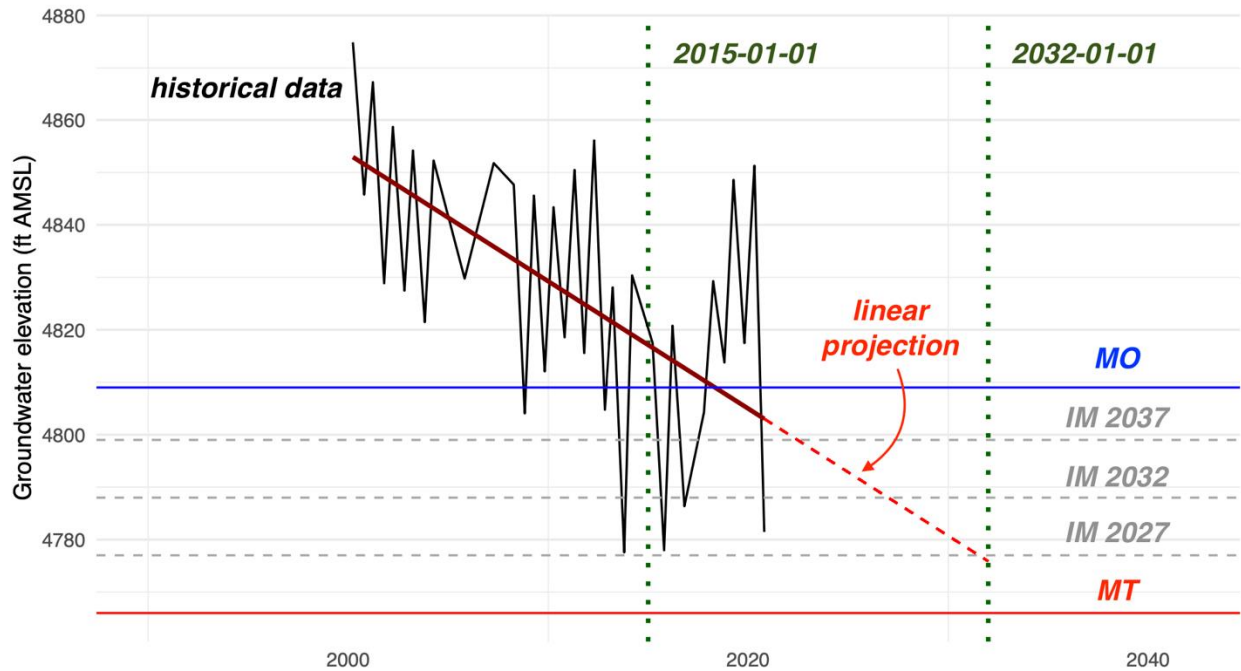

331


332
333

Figure 3.3.1-1. Analysis of Historical Groundwater Levels and SMC at all Representative Monitoring Points. Please see Appendix 3-2 for all hydrographs.

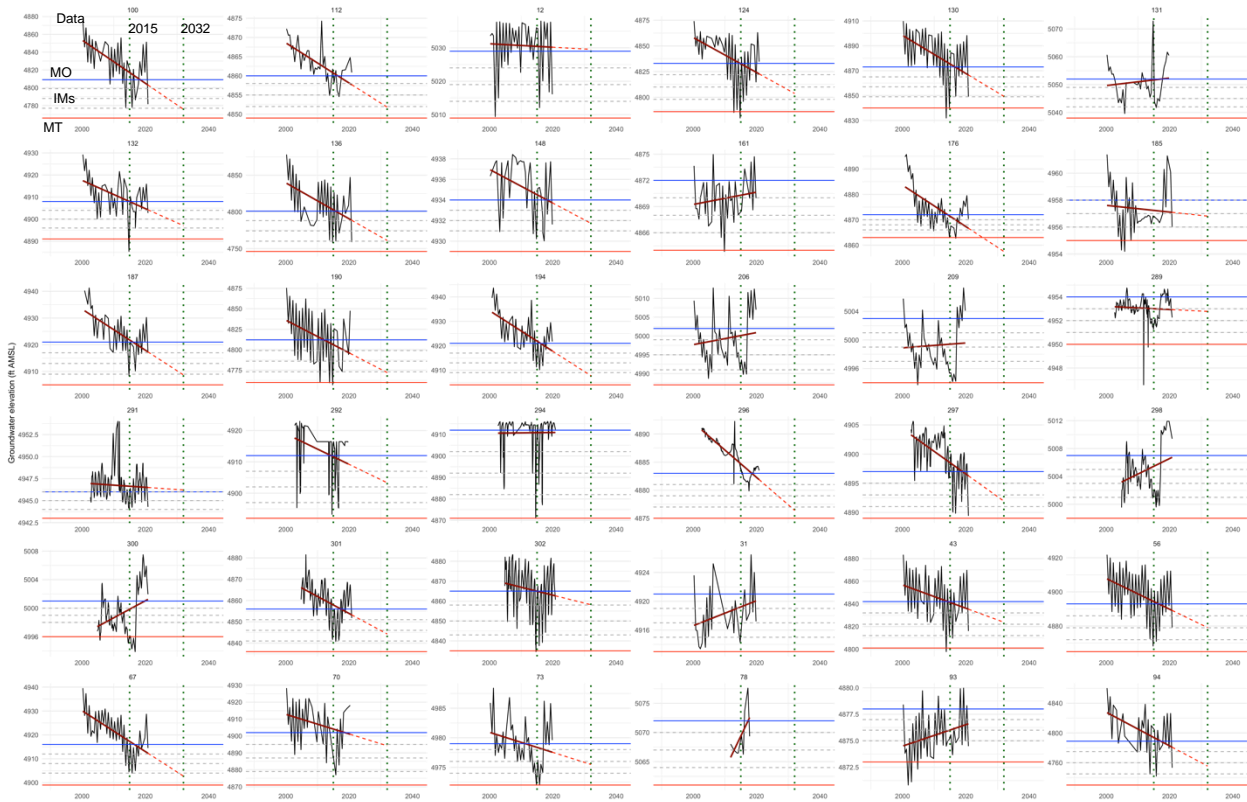

334

335 **Figure N2:** Groundwater level, storage, and ISW RMP locations. Each point is made slightly
 336 transparent to show overlapping points, which correspond to monitoring multiple depths at
 337 multi-completion wells.

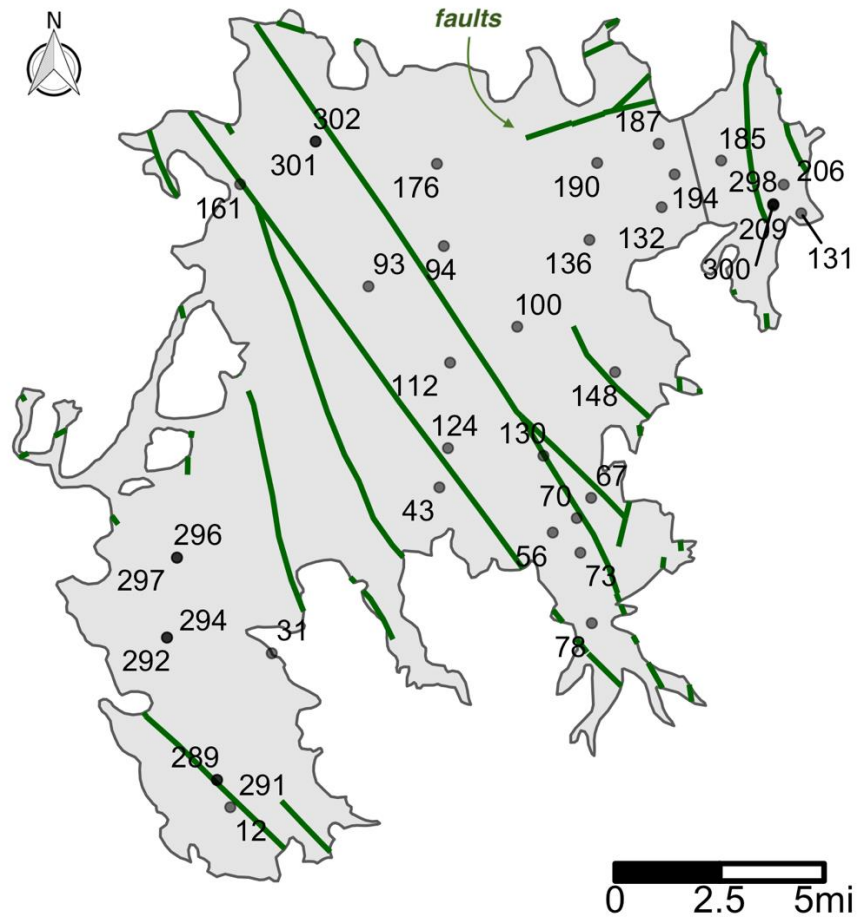

338


339

340

Figure 3.3.1-2. Minimum thresholds are not substantially lower than lowest recorded groundwater elevations (Fall 2015), and maintain elevations above historic lows near ISW. Point values and

341
342

colors correspond the depth below the 2015 low groundwater level (darker is deeper). Green lines represent faults.

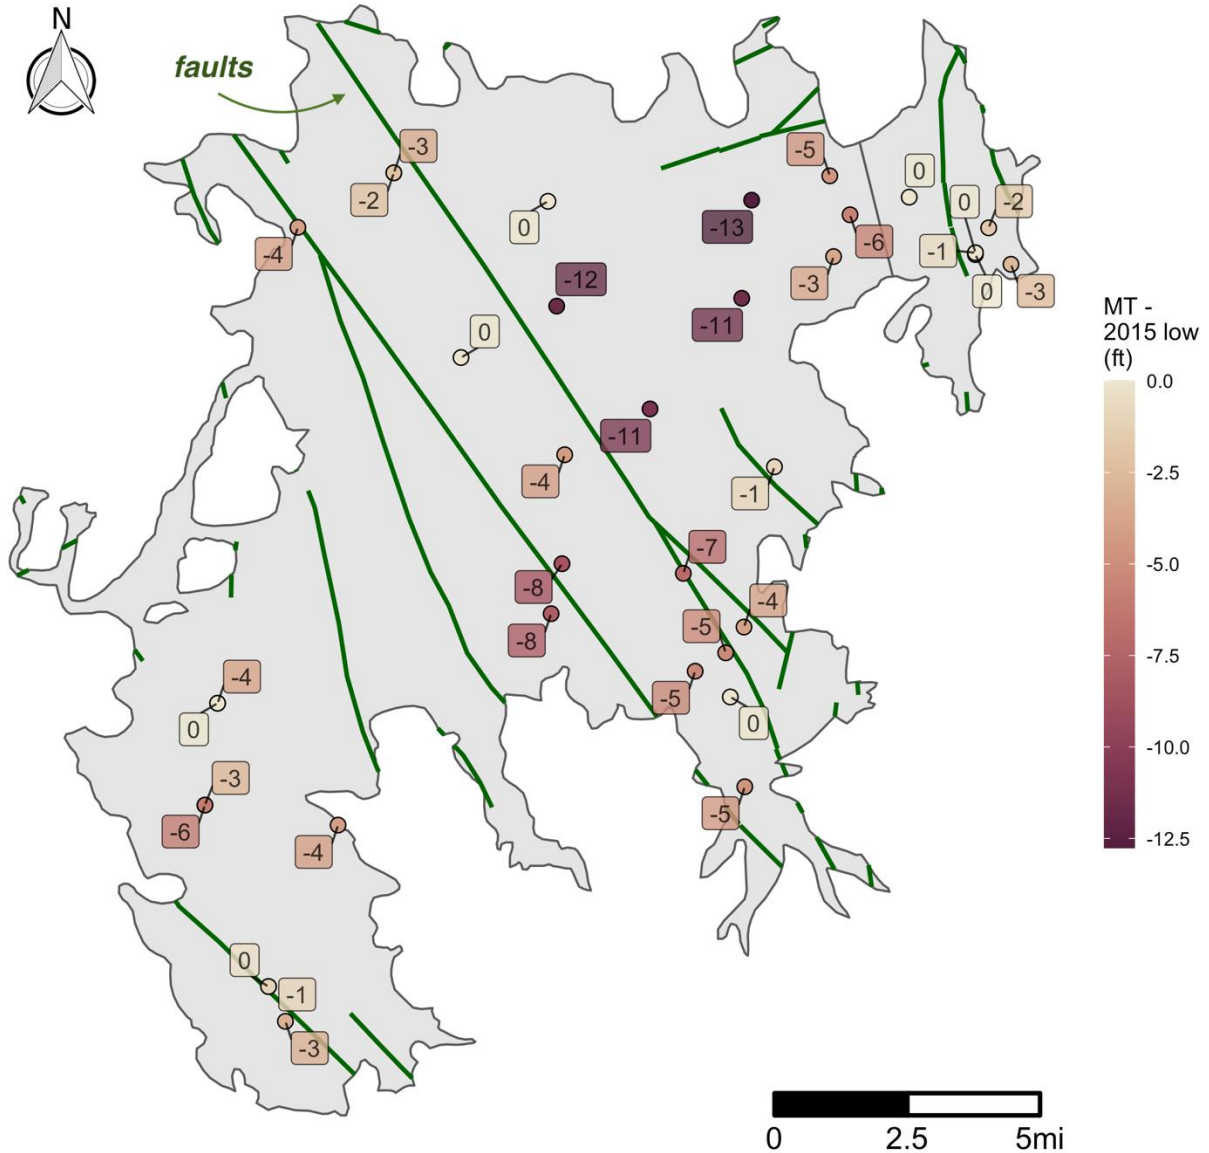

343 3.3.1.4.2 Method for Quantitative Measurement of Minimum Thresholds

344 The groundwater elevation at each RMP will be monitored at least biannually to directly assess
 345 the SMC. The RMPs and associated SMC are listed in **Table 3.3.1-1** and presented spatially in
 346 **Figure 3.3.1-3**. Note that in some instances, multiple wells are included at the same location
 347 (e.g., nested wells). These wells are denoted by duplicate labels in the figure and have unique
 348 RMP IDs as well as unique screened intervals. These monitoring locations are unique in that
 349 they capture shallow and deep aquifer zones.

350
351


Table 3.3.1-1. Representative Monitoring Point (RMP) Elevations and Minimum Thresholds (MTs) and Measurable Objectives (MOs). RMP locations shown in **Figure N2.**

RMP ID	Site Code	Ground Surface (ft AMSL)	Last Measured Date	Last measured Water Surface ⁽¹⁾ (ft AMSL)	MO (ft AMSL)	MT (ft AMSL)
12	395808N1203851W001	5,038.6	2019-10-23	5,016.1	5,029	5,009
31	396391N1203667W001	4,938.6	2019-10-23	4,917.2	4,921	4,913
43	396970N1202916W001	4,895.6	2020-10-21	4,816	4,842	4,801
56	396814N1202407W001	4,945.7	2020-10-21	4,879	4,893	4,865
60	396718N1202721W001	5,003.7	2020-10-21	4,916.2	4,915	4,904
67	396934N1202234W001	4,969.7	2020-10-21	4,914.5	4,916	4,899
70	396864N1202299W001	4,963.7	2020-04-24	4,918.1	4,902	4,871
73	396744N1202282W001	4,998.7	2019-10-23	4,979.6	4,979	4,972
78	396599N1202229W001	5,093.8	2017-10-16	5,069.3	5,072	5,061
93	397667N1203238W001	4,880.5	2020-10-21	4,874.5	4,878	4,873
94	397808N1202893W001	4,894.3	2020-10-22	4,753.2	4,789	4,730
100	397529N1202568W001	4,896.6	2020-10-21	4,781.5	4,809	4,766
112	397403N1202870W001	4,884.5	2020-10-21	4,860.9	4,860	4,849
124	397106N1202878W001	4,888.6	2020-10-21	4,834.7	4,833	4,786
130	397081N1202449W001	4,911.6	2020-10-21	4,848.8	4,873	4,840
131	397927N1201294W001	5,093.6	2019-10-24	5,060.5	5,052	5,038
132	397945N1201920W001	4,935.6	2020-10-20	4,902.8	4,908	4,891
136	397831N1202245W001	4,911.6	2020-10-20	4,758.7	4,801	4,746
148	397372N1202128W001	4,938.2	2019-10-23	4,931.6	4,934	4,929
161	398020N1203815W001	4,881	2019-10-23	4,870	4,872	4,864
176	398094N1202932W001	4,891.8	2020-10-20	4,870.3	4,872	4,863
185	398107N1201653W001	4,966.8	2020-10-20	4,956	4,958	4,955
187	398165N1201934W001	4,942.1	2020-10-20	4,917.3	4,921	4,905
190	398098N1202211W001	4,918.6	2020-04-24	4,847.6	4,812	4,760
194	398059N1201862W001	4,943.6	2019-10-24	4,921.7	4,921	4,904
206	398024N1201371W001	5,013.6	2019-10-24	5,007	5,002	4,987
209	397951N1201418W001	5,013.6	2019-10-24	5,004.1	5,003	4,994
289	395951N1203910W003	4,953.4	2020-10-20	4,952.3	4,954	4,950
291	395951N1203910W001	4,953.3	2020-10-20	4,944.3	4,946	4,943
292	396444N1204137W003	4,915.2	2019-09-01	4,916.3	4,912	4,892
294	396444N1204137W001	4,915.2	2020-10-20	4,912.3	4,912	4,871

296	396722N1204095W002	4,920.1	2020-10-20	4,883.51	4,883	4,875
297	396722N1204095W001	4,919.4	2020-10-20	4,889.41	4,897	4,889
298	397956N1201417W001	5,010.6	2020-10-20	5,009.4	5,007	4,998
300	397956N1201417W003	5,010.6	2020-10-20	5,001.95	5,001	4,996
301	398170N1203478W001	4,890.48	2020-10-21	4,851.75	4,856	4,836
302	398170N1203478W002	4,890.48	2020-10-21	4,860.68	4,865	4,835

352 (1) Water surface at last available measurement.

353 **Figure 3.3.1-3. Minimum Thresholds in elevation above mean sea level (left) and below land**
 354 **surface (right) for the Representative Monitoring Points**
 355 **(duplicate labels indicate nested monitoring wells)**

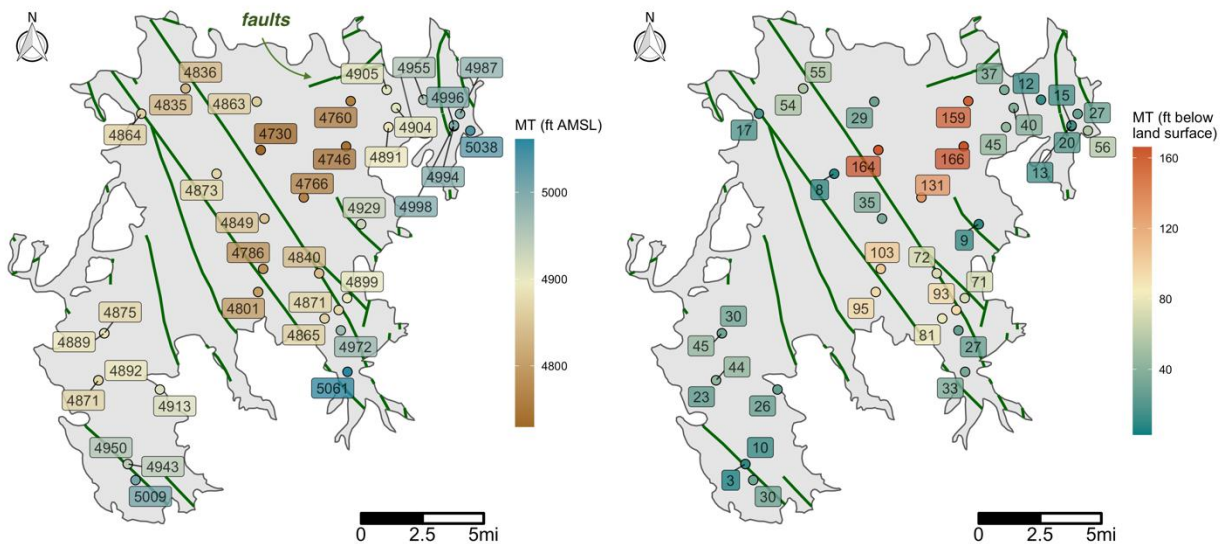


356 **3.3.1.5 Measurable Objectives**

357 The groundwater elevation MOs for the SV Subbasin are set to represent the current condition
 358 of the Subbasin and correspond to management goals that maintain these levels.

359 **3.3.1.5.1 Description of Measurable Objectives**

360 For all RMPs, MOs are set to the average water level observed from January 2015 to
 361 June 2021. Each MO was rounded to the nearest integer to ease interpretation. The MOs are
 362 listed for each RMP in **Table 3.3.1-1** and presented in **Figure 3.3.1-4**.

Figure 3.3.1-5: Groundwater Level Sustainable Management Criteria Flow Chart

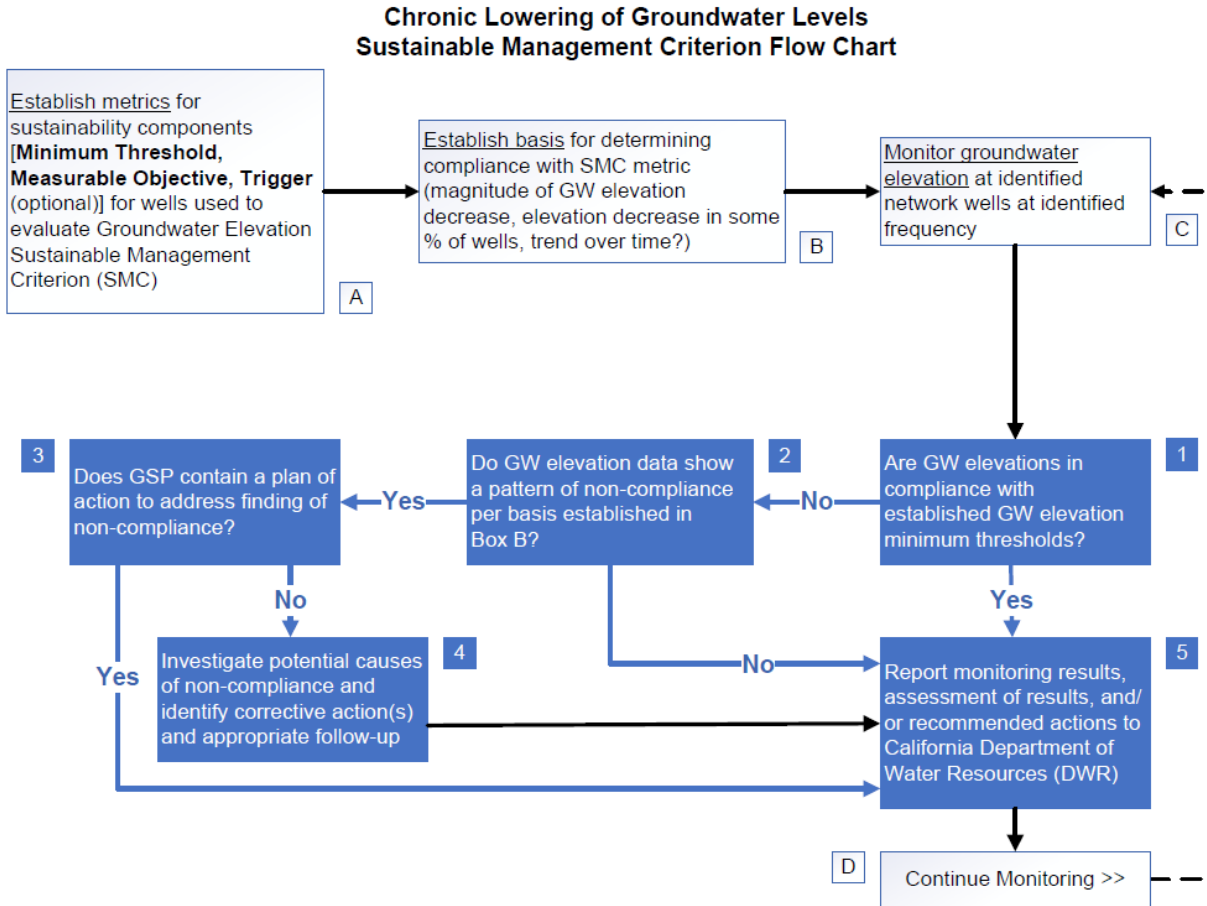

388 **3.3.1.6.1 Interim Milestones**

389 Interim milestones (IMs) were defined as regular 5 year long intervals between the MT and MO
 390 at 2027, 2032, and 2037. The MO can be understood as the fourth and final IM. When the
 391 operational flexibility for an RMP is less than 3 feet, due to nearest-integer-rounding, one or
 392 more IMs will be equal to the MO.

393 **3.3.2 Groundwater Storage**

394 Chronic lowering of groundwater levels is directly correlated with reduction of groundwater
 395 storage. Groundwater storage is the three-dimensional equivalent of groundwater level (one-
 396 dimensional) over an area. Reduction in groundwater storage generally indicates groundwater
 397 level decline, and vice versa. Thus, groundwater levels may be used as a proxy for groundwater
 398 storage, and the potential causes and identification of Undesirable Results related to reduction
 399 in groundwater storage are identical to those related to chronic lowering of groundwater levels
 400 **(Section 3.3.1.1).**

401 GSAs will track and project groundwater storage with the Sierra Valley integrated hydrologic
 402 model, and calibrate groundwater storage estimates based on data collected throughout the
 403 Subbasin. As before, potential effects of Undesirable Results on beneficial uses and users of

404 groundwater due to reduced groundwater storage are identical to those outlined due to chronic
405 lowering of groundwater levels (**Section 3.3.1.2**), as are SMC (**Sections 3.3.1.4 - 3.3.1.6**).

406 **3.3.3 Depletion of Interconnected Surface Waters**

407 **3.3.3.1 Undesirable Results – Depletion of Interconnected Surface Water**

408 Depletion of ISW is related to chronic lowering of groundwater levels via changes in the
409 hydraulic gradient. Darcy’s Law is a fundamental tenet of groundwater hydrogeology that
410 explains this.¹ It states that the amount of water that flows through an aquifer (e.g., ISW
411 depletion) is proportional to the hydraulic gradient (in this case, the difference between the
412 water surface elevation in the stream (‘stage’) and adjacent groundwater elevation). Hence,
413 declines in groundwater level which increase the hydraulic gradient between the ISW and the
414 aquifer also increase ISW depletion.

415 Significant and unreasonable depletion of interconnected surface water (ISW) due to
416 groundwater extraction will be identified if ISW depletion exceeds the maximum depletion rates
417 indicated in the monitoring record from January 2000 to January 2021. At the time of writing,
418 these rates have not been calculated and depend on results from the Sierra Valley integrated
419 hydrologic model. However, in the absence of conclusive modeling, this GSP conservatively
420 assumes that ISW depletion is occurring based on groundwater level declines near ISWs, but
421 this depletion does not appear to be significant and unreasonable. The conservative approach
422 of not worsening ISW gradients is taken to ensure that previously unexperienced effects do not
423 occur in the Subbasin. These management objectives to maintain ISWs are quantitatively
424 achieved by maintaining groundwater levels near ISW at historical levels, which thereby
425 maintains hydraulic gradients and ISW depletion.

426 *3.3.3.1.1 Potential Causes of Undesirable Results*

427 Depletion of ISW could be caused by increased pumping and/or reduced recharge (e.g., due to
428 drought, climate change, or changes in irrigation rates or practices). Most of the pumped
429 groundwater in the basin is used for agriculture; therefore, increased demand per irrigated acre
430 or an increase in irrigated acreage could result in depletions to surface water. Natural and
431 managed variability in the timing and magnitude of inter- and intra-basin diversions could also
432 affect recharge and available surface water and lead to ISW depletion. Additionally, efforts to
433 move from flood irrigation (commonly practiced on the south and west sides of the valley) to
434 spray irrigation could increase irrigation efficiency but also potentially reduce recharge, leading
435 to lower groundwater level and hence, ISW depletion. **The inter-basin diversion from the Little
436 Truckee River supplies substantial surface water (6,693 acre-feet on average from 1959 to
437 2020) to Sierra Valley during the irrigation season. [may need to clarify the implications of this
438 further] In a warming climate,** reduced snowpack and spring and summer runoff could affect the
439 availability of water from the Little Truckee Diversion. Other factors related to climate change
440 such as decreased precipitation and increased evapotranspiration could also lead to ISW
441 depletion.

442 **3.3.3.2 Effects on Beneficial Uses and Users**

443 Undesirable Results would affect agricultural and environmental uses and users, as well as the
444 economy and tourism. Many agricultural users rely heavily on surface water to irrigate pasture.
445 Ongoing or increased groundwater pumping could alter the horizontal and vertical gradients that
446 affect the rates and direction of groundwater flow. Streams and GDEs could switch from gaining

¹ Darcy’s Law, $Q = K \cdot A \cdot i$ states that the volumetric rate of flow Q is proportional to the hydraulic conductivity (K , or resistance to flow), the cross-sectional area (A , in this case, of the streambed), and the hydraulic gradient i (in this case, the difference between water surface elevation in the stream (‘stage’) and adjacent groundwater level). Thus, as the difference between stream stage and groundwater level increases, the hydraulic gradient (i) increases, which makes streamflow depletion (Q) increase.

447 to losing if groundwater levels decline past critical thresholds, which would result in less
448 available surface water for irrigation, and stream losses into shallow aquifers. In addition to
449 affecting the quantity of water available, it is possible that water quality may also be impacted.

450 ISW provides habitat for priority species, thus ISW depletion may impact these beneficial users.
451 Late summer and early fall are particularly important, as some ISW streams may depend on late
452 season groundwater discharge to support baseflow when snowmelt and surface runoff are at a
453 minimum. ISW depletion could not only decrease the availability, but also the quality of habitat
454 for aquatic species. In late summer and fall conditions, upwelling of relatively cool groundwater
455 near springs and flowing wells helps maintain surface water temperature from warming
456 excessively and negatively impacting priority species. In Sierra Valley, the location and degree
457 to which ISW depletion may impact sensitive species is poorly understood. Monitoring of
458 species diversity, populations, and available habitat occurs, but is insufficient to fully understand
459 the impacts of ISW depletion on such environmental systems. Widespread monitoring and
460 documentation needs are discussed further in **Section 3.4.1.4**.

461 **3.3.3.3 Relationship to Other Sustainability Indicators**

462 Minimum thresholds (MTs) established for the depletion of interconnected surface water are the
463 most conservative of the sustainability indicators, in that they do not allow for future conditions
464 that exceed historically observed ISW depletion.

465 Increased ISW depletion results from chronic lowering of groundwater levels that increase the
466 stream-aquifer hydraulic gradient, and hence, increase depletion. Therefore, by effectively
467 managing groundwater levels to avoid decline, ISW depletion can also be managed. Moreover,
468 monitoring and forecasting basin-wide storage also provides a big picture view of how ISW
469 depletion may be impacted, although spatially distributed changes in groundwater level are
470 much more useful in isolating local-scale ISW impacts.

471 Groundwater level SMC at some RMPs allow minimum thresholds lower than historically
472 observed groundwater levels, but that still avoid impacts to beneficial users (Figure 3.3.1-1). In
473 contrast, in ISW zones, groundwater level MTs are adjusted consistent with ISW MTs, such that
474 no additional groundwater level depletion occurs in excess of historical impacts (i.e., observed
475 between January 2000 and January 2021).

476 **3.3.3.4 Information and Methodology Used to Establish Minimum Thresholds and** 477 **Measurable Objectives**

478 *3.3.3.4.1 Groundwater Elevations as a Proxy for Depletion of Interconnected Surface Water* 479 *Minimum Thresholds*

480 Depletion of Interconnected Surface Water as a volume or rate is difficult to quantify in Sierra
481 Valley due to data gaps. Groundwater monitoring data is lacking near ISW, and there are no
482 continuous streamflow or stage gages within the basin. Data collected by the DWR
483 Watermaster for Sierra Valley is only done in preparation for and during the irrigation season
484 with periodic measurements on up to 12 different tributaries. Due to the discontinuous nature of
485 these measurements, simple mass-balance approaches to ISW depletion estimation are
486 infeasible.

487 Estimation of ISW depletion is in development and will be achieved through the use of the
488 Sierra Valley integrated surface water-groundwater model. Two different scenarios will be
489 evaluated: with and without pumping. All other model inputs will remain the same between the
490 two scenarios. Streamflow results will be compared, and the difference, measured as a volume
491 or rate, is the amount of surface water depletion due to groundwater pumping. In lieu of results

492 from this integrated surface and groundwater model, we conservatively set ISW SMC to
493 maintain hydraulic gradients near ISW.


494 As noted above, groundwater elevations directly control the stream-aquifer hydraulic gradient,
495 and thus, the magnitude of ISW depletion. In the absence of high-confidence estimates of
496 streamflow depletion, but reasonable groundwater level data, groundwater levels are used as a
497 proxy for ISW depletion (similar to other sustainability indicators). Therefore, conservative MTs
498 are set near ISW and GDEs that would maintain groundwater elevations above historically
499 observed lows and thus reduce the risk that hydraulic gradients between surface and
500 groundwater do not reverse or steepen. In other words, these conservative groundwater level
501 MTs protect ISW from experiencing depletion in excess of historically observed values by
502 controlling stream-aquifer hydraulic gradients.

503 To protect priority species that rely on ISW, MTs are set for existing monitoring wells that are
504 located nearest to GDEs and ISW. RMPs associated with ISW or GDEs that support priority
505 species are assigned a groundwater level MT equal to the lowest reading since January 2000
506 (Figure 3.3.3-1, Figure 3.3.3-2, and Table 3.3.3-1). *[values may be modified based on*
507 *stakeholder input]* All ISW RMPs are contained in the groundwater level RMP network
508 except 37 and 364 because their locations overlap with other RMPs.


509 **Table 3.3.3-1. MTs and MOs for select RMPs associated with GDEs and ISW**

RMP ID	Well Name	Site Code	Water Surface (ft AMSL)	Ground Surface (ft AMSL)	MO (ft AMSL)	MT (ft AMSL)
12	20N14E14R001M	395808N1203851W001	5,016.1	5,038.6	5,029	5,009
37	DMW 1s	396976N1202492W001	4,898.2	4,916.6	4,898	4,895
31	21N14E25P003M	396391N1203667W001	4,917.2	4,938.6	4,921	4,913
73	21N16E18G002M	396744N1202282W001	4,979.6	4,998.7	4,979	4,972
161	23N14E35L001M	398020N1203815W001	4,869.96	4,880.96	4,872	4,864
176	23N15E34D001M	398094N1202932W001	4,870.33	4,891.83	4,872	4,863
209	23N16E36N002M	397951N1201418W001	5,004.1	5,013.6	5,003	4,994
291	DMW 2s	395951N1203910W001	4,944.29	4,953.3	4,946	4,943
294	DMW 3s	396444N1204137W001	4,912.25	4,915.2	4,911	4,871
297	DMW 4s	396722N1204095W001	4,889.41	4,919.4	4,897	4,889
300	DMW 5s	397956N1201417W003	5,001.95	5,010.6	5,001	4,996
301	DMW 6s	398170N1203478W002	4,860.68	4,890.48	4,864	4,835
364	DMW 7s	N/A	4,886.7	4,895.9	4,887	4,887

Figure 3.3.3-1. Proposed Representative Monitoring Points for ISW and GDEs

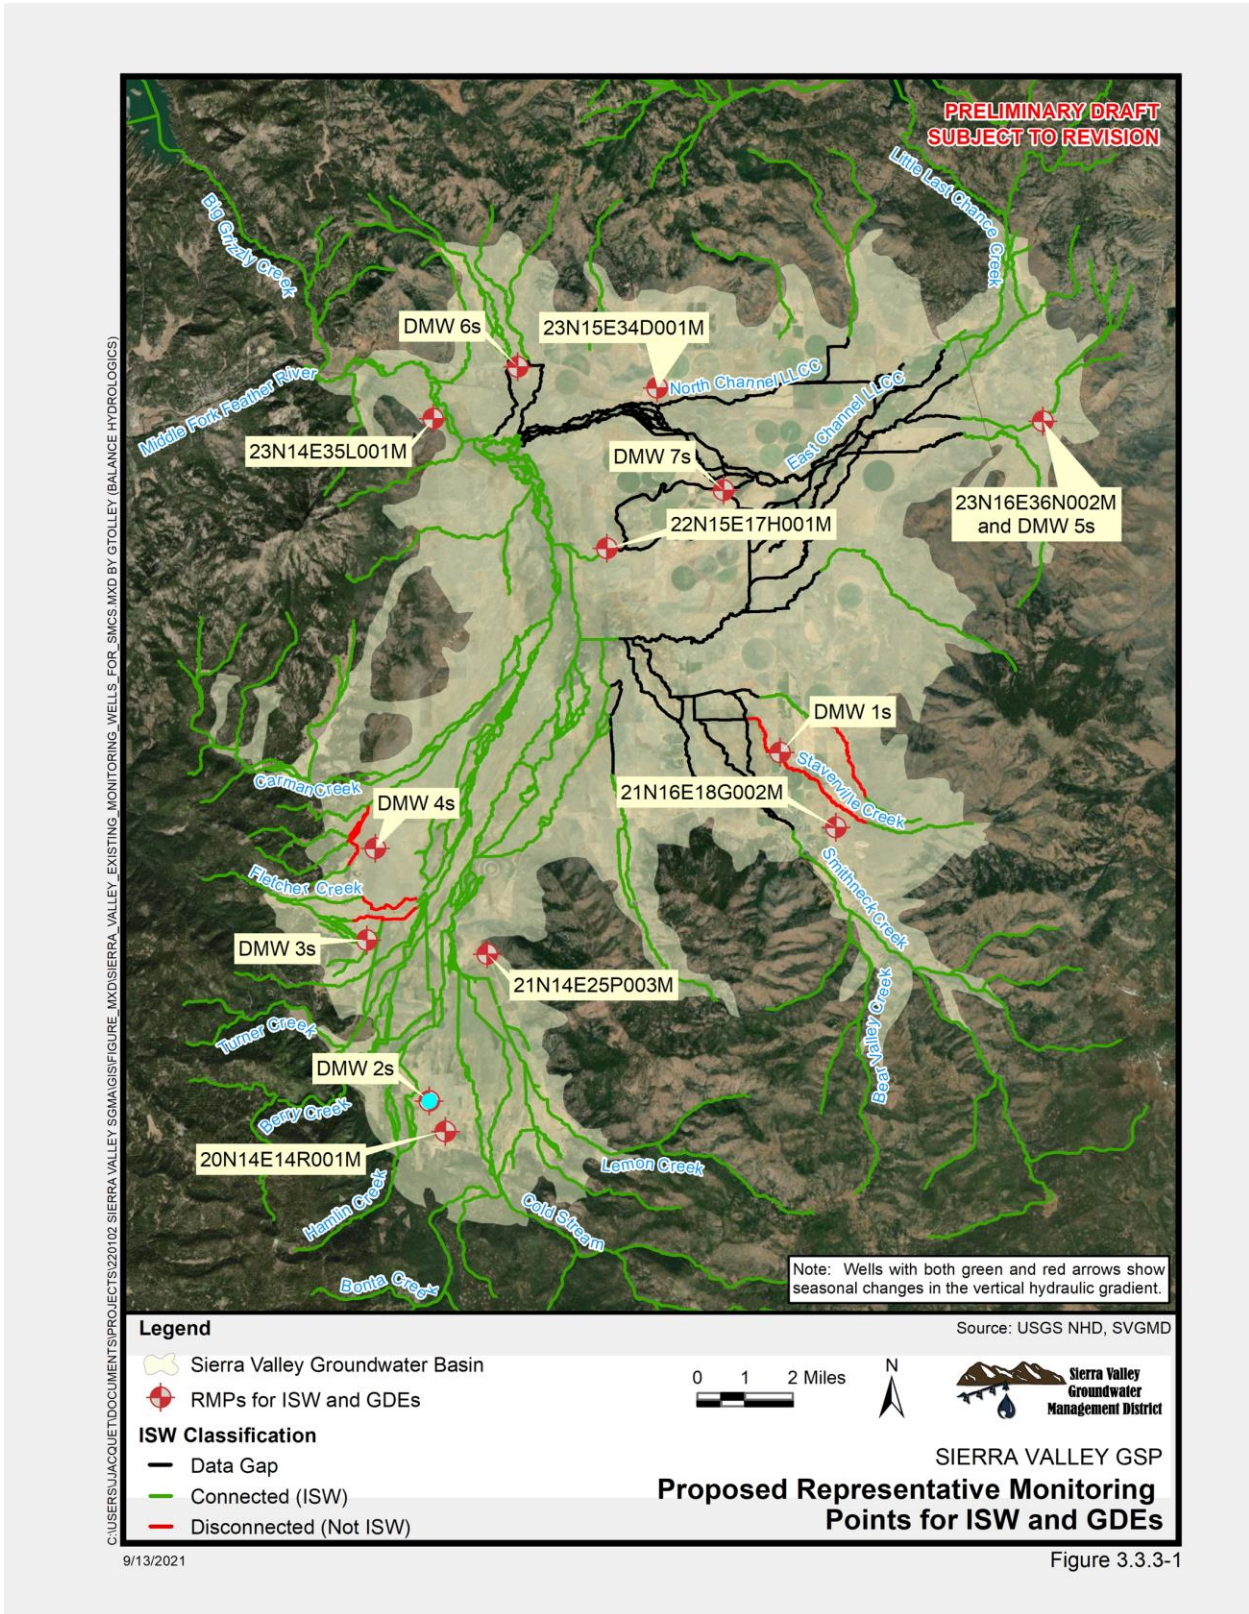


511 **Figure 3.3.3-2. MTs at ISW RMPs in terms of elevation above mean sea level (left) and depth below**
 512 **land surface (right). Faults are shown as dark green lines. ISW classification (Chapter 2) is shown**
 513 **for data gaps (orange), disconnected reaches (red), and ISW (blue).**

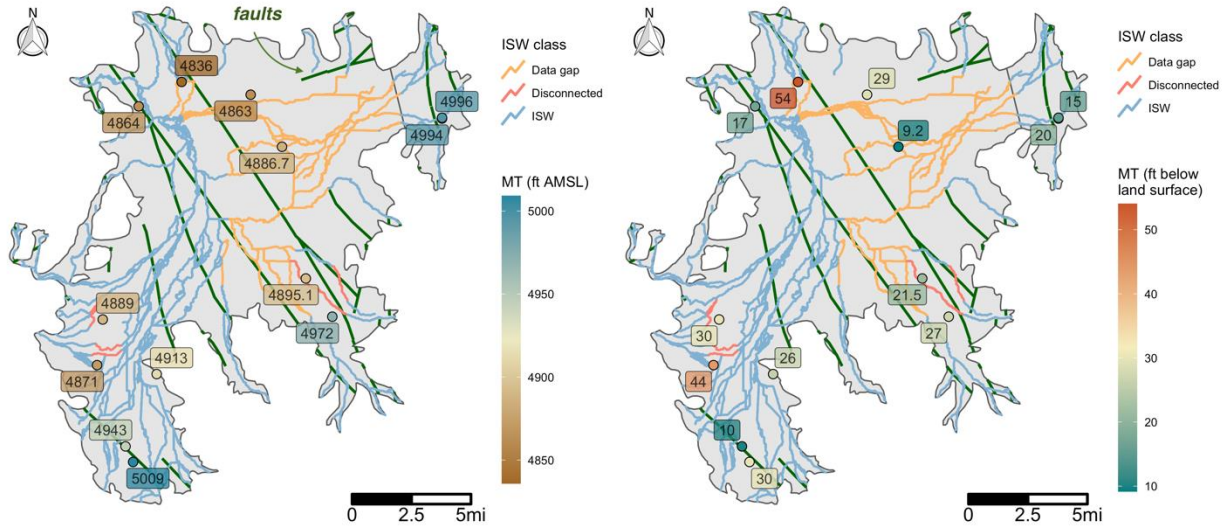

514 **3.3.3.5 Measurable Objectives**

515 Measurable Objectives for the depletion of ISW are consistent with those for Groundwater
 516 Elevation. Thus, ISW MOs are based on the mean of the current (2015 to 2021) groundwater
 517 conditions in the basin at each RMPs (Figure 3.3.3-3 and Table 3.3.3-1).

518 **Figure 3.3.3-3. MOs at ISW RMPs in terms of elevation above mean sea level (left) and depth**
 519 **below land surface (right). Faults are shown as dark green lines. ISW classification (Chapter 2) is**
 520 **shown for data gaps (orange), disconnected reaches (red), and ISW (blue).**

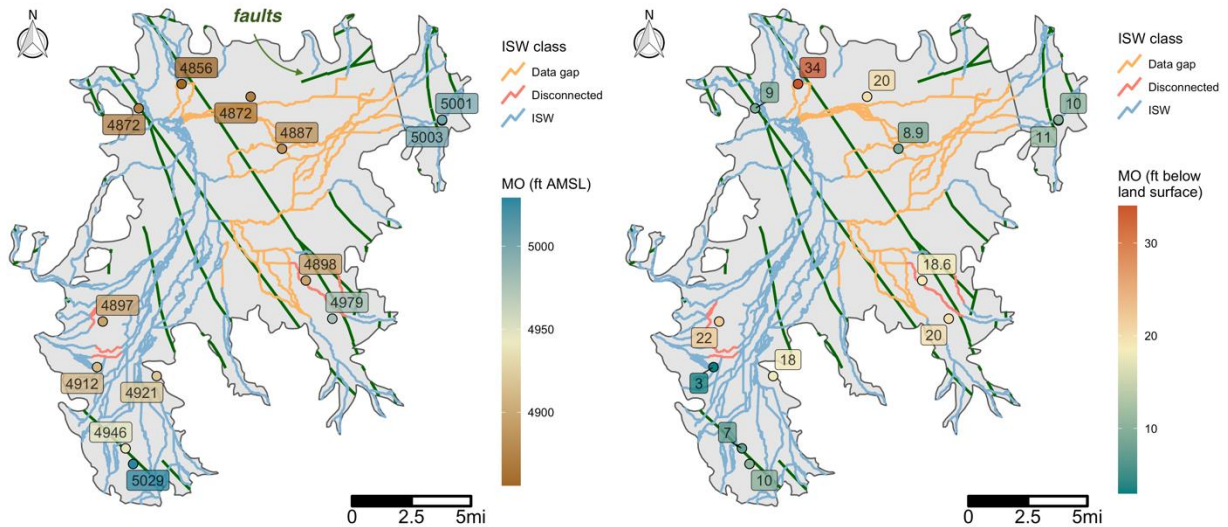

521 **3.3.3.6 Path to Achieve Measurable Objectives**

522 The GSA will support achievement of the measurable objectives by monitoring groundwater
 523 levels and surface water elevations at RMPs and coordinating with agencies and stakeholders
 524 within the Basin to implement projects and management actions (PMAs). The GSA will review
 525 and analyze groundwater level data to evaluate any changes in groundwater levels resulting
 526 from groundwater pumping or recharge projects in the Basin. Using monitoring data collected as
 527 part of GSP implementation (as discussed further with respect to process and timing in
 528 Chapters 4 and 5), the GSA will develop information (e.g., hydrographs) to demonstrate that
 529 projects and management actions are operating to maintain or improve groundwater level
 530 conditions in the Basin and to avoid unreasonable groundwater levels. Should groundwater
 531 levels drop to a **trigger** or minimum threshold, the GSAs may implement measures to address
 532 this occurrence.

533 **3.3.3.7 Interim Milestones**

534 **Interim milestones are consistent with those set for groundwater level SMC (Section 3.3.1.6.1).**

535 **3.3.4 Degraded Groundwater Quality**

536 Groundwater quality in the SV Subbasin is generally good and well-suited for the municipal,
 537 domestic, agricultural, and other existing and potential beneficial uses designated for
 538 groundwater in the Water Quality Control Plan for the Sacramento River Basin and the
 539 San Joaquin River Basin (Basin Plan). Existing groundwater quality concerns within the SV
 540 Subbasin are identified in **Section 2.2.2.4**, and a detailed water quality assessment is included
 541 in **Appendix 2-6 of Chapter 2**. Based on the water quality assessment, constituents of concern
 542 in the SV Subbasin were deemed to include nitrate, total dissolved solids (TDS), arsenic, boron,
 543 pH, iron, manganese, and MTBE. SMCs are defined for two constituents: nitrate and TDS.

544 Arsenic, boron, pH, iron, and manganese are impacted significantly by natural processes and
545 local geological conditions that are not controllable by the GSAs through groundwater
546 management processes. Therefore, SMCs are not defined for these constituents. Additionally,
547 as detailed in **Section 2.2.2.4**, MTBE have diminished substantially over the last 10 years: from
548 2016 to 2020 no exceedances of the 5 µg/L SMCL occurred and the highest concentration
549 measured during this period was 0.7 µg/L), and therefore no SMC is defined for this constituent,
550 and moreover it is associated with contaminated sites that have dedicated monitoring and
551 cleanup and is not likely a risk for future contamination.

552 In addition to conducting monitoring for the constituents with SMCs (nitrate and TDS), the GSA
553 will monitor arsenic, boron, and pH to track any potential mobilization of elevated concentrations
554 or exceedances of the Maximum Contaminant Levels (MCLs, provided in **Section 2.2.2.4**,
555 **Table 2.2.2-1**). As the regional groundwater flow model becomes available, additional attention
556 will be paid to how groundwater pumping may mobilize contaminant plumes.

557 Water quality degradation is typically associated with increasing constituent concentration, thus
558 the GSAs have decided not to use the term “minimum threshold” in the context of water quality,
559 but rather, “maximum threshold”.

560 **3.3.4.1 Undesirable Results**

561 An undesirable result under SGMA is defined as an impact that is determined to be significant
562 and unreasonable, as previously defined in **Section 3.1**. Significant and unreasonable
563 degradation of groundwater quality is the degradation of water quality that would impair
564 beneficial uses of groundwater within the SV Subbasin or result in the failure to comply with
565 groundwater regulatory thresholds including state and federal drinking water standards and
566 Basin Plan water quality objectives. While others may be identified, undesirable results to
567 groundwater quality that are currently of primary concern include:

- 568 • adverse groundwater quality impacts to safe drinking water,
- 569 • adverse groundwater quality impacts to irrigation water use,
- 570 • the spread of degraded water quality through old or abandoned wells; and,
- 571 • the spread of degraded groundwater quality.

572 Based on the State’s 1968 antidegradation policy², water quality degradation inconsistent with
573 the provisions of this policy is degradation determined to be significant and unreasonable.
574 Furthermore, the violation of water quality objectives is significant and unreasonable under the
575 State’s antidegradation policy. The Central Valley Regional Water Quality Control Board
576 (Regional Board) and the State Water Board are the two entities that determine if degradation is
577 inconsistent with Resolution No. 68-16.

578 Federal and state water quality standards, water quality objectives defined in the Basin Plan,
579 and the management of known and suspected contaminated sites within the Subbasin will
580 continue to be the jurisdictional responsibility of the relevant regulatory agencies. The role of the
581 GSAs is to provide additional local oversight of groundwater quality, collaborate with appropriate
582 parties to implement water quality projects and actions, and to evaluate and monitor, as needed,
583 water quality effects of projects and actions implemented to meet the requirements of other
584 SMCs.

² State Water Resources Control Board. “Resolution No. 68-16: Statement of Policy with Respect to Maintaining High Quality of Waters in California”, California, October 28, 1968.

585 Sustainable management of groundwater quality includes maintenance of water quality within
586 regulatory and programmatic limits while executing GSP projects and actions. To achieve this
587 goal, the GSAs will coordinate with the regulatory agencies that are currently authorized to
588 maintain and improve groundwater quality within the Subbasin. This includes informing the
589 Regional Board of any issues that arise and working with the Regional Board to address
590 potential problems. All future projects and management actions implemented by the GSAs will
591 be evaluated and designed to avoid causing undesirable groundwater quality outcomes.
592 Monitoring should be included as part of the applicable project or management action to allow
593 evaluation of any impacts. Historic and current groundwater quality monitoring data and
594 reporting efforts have been used to document baseline groundwater quality conditions in the
595 basin. These conditions provide a baseline to compare with future groundwater quality and
596 identify any changes observed due to GSP implementation.

597 In addition to supporting agricultural and domestic water supply beneficial uses, groundwater
598 also supports GDEs and instream environmental resources. These beneficial uses, among
599 others, are protected in part by the Regional Board through the water quality objectives adopted
600 in the Basin Plan. The constituents of concern in the Subbasin, and their associated regulatory
601 thresholds, are listed in **Section 2.2.2.4**.

602 *3.3.4.1.1 Potential Causes of Undesirable Results*

603 Future monitored activities or conditions with potential to affect water quality may include
604 significant changes in location and magnitude of groundwater pumping or changes to planned
605 and incidental groundwater recharge mechanisms sufficient to change the flow and transport of
606 subsurface contaminants. Altering the location or rate of groundwater pumping could change
607 the direction of groundwater flow which may redirect existing contaminant plumes, or plumes
608 that may develop in the future, thus potentially compromising ongoing remediation efforts.
609 Similarly, recharge activities could alter hydraulic gradients which could result in the downward
610 movement of contaminants into groundwater or move existing groundwater contaminant plumes
611 towards supply wells.

612 Sources and activities that may lead to undesirable groundwater quality include industrial
613 contamination, pesticides, sewage, animal waste, and other wastewaters, and natural causes.
614 Fertilizers and other agricultural activities can elevate concentrations of constituents such as
615 nitrate and TDS. Wastewater, such as sewage from septic tanks and animal waste, can also
616 elevate nitrate and TDS concentrations. Natural causes, such as local volcanic geology and
617 soils), can elevate concentrations of arsenic, boron, iron, manganese, pH, and TDS. The GSAs
618 cannot control and are not responsible for natural causes of groundwater contamination but are
619 responsible for how project and management actions may impact groundwater quality (e.g.,
620 through mobilization of naturally occurring contaminants).

621 Groundwater quality degradation associated with known sources will be primarily managed by
622 the Regional Board which is the entity currently overseeing such sites. In the SV Subbasin,
623 existing contaminant sites are currently being managed, and though additional degradation is
624 not anticipated from known sources, new sites may cause undesirable results due to
625 constituents that, depending on the contents, may include petroleum hydrocarbons, solvents, or
626 other contaminants. The Subbasin is not currently categorized as a priority subbasin under the
627 CV-SALTS program managed by the Regional Board.

628 Agricultural activities in the SV Subbasin primarily include pasture, grain and hay, and alfalfa.
629 Alfalfa and pasture production have low risk for fertilizer-associated nitrate leaching into the
630 groundwater (Harter et al., 2017). Grain production is rotated with alfalfa production, usually for
631 one year, after which alfalfa is replanted. Grain production also does not pose a significant

632 nitrate-leaching risk. Animal farming, a common source of nitrate pollution, is present but not at
633 stocking densities of major concern. Changes or additions to land uses may require a re-
634 examination of groundwater contamination risk.

635 **3.3.4.2 Effects on Beneficial Uses and Users**

636 Potential adverse water quality impacts to the beneficial uses of groundwater in the Subbasin
637 are identified by elevated or increasing concentrations of constituents of concern, and the
638 potential local or regional effects that degraded water quality can have on such beneficial uses.
639 Potential adverse water quality impacts to the beneficial uses of groundwater in the Subbasin
640 are identified by elevated or increasing concentrations of constituents of concern, and the
641 potential local or regional effects that degraded water quality can have on such beneficial uses.

642 The potential impact of poor groundwater quality on major classes of beneficial users is now
643 discussed:

- 644 • **Municipal Drinking Water Users:** Under California law, agencies that provide drinking
645 water are required to routinely sample groundwater wells and compare the results to
646 state and federal drinking water standards for individual constituents. Groundwater
647 quality that does not meet state drinking water standards may render the water unusable
648 or require additional treatment, carried out by the agency. Impacted municipal supply
649 wells may potentially be taken offline until a solution is found, depending on the
650 constituents detected and the configuration of the municipal system in question. This
651 reduces the reliability of the overall water supply system during the rehabilitation period.
- 652 • **Rural and/or Agricultural Residential Drinking Water Users:** Residential structures
653 not located within the service areas of a local municipal water agency or private water
654 supplier will typically obtain water supply from private domestic groundwater wells.
655 Unless the number of connections serviced by the well is sufficiently large, the well will
656 not have a regulatory groundwater quality testing requirement. Thus, groundwater
657 quality at such wells may be unknown unless the landowner has initiated testing and
658 shared the data with other entities. Degraded water quality in such wells can lead to rural
659 residential groundwater use that poses health consequences, does not meet potable
660 water standards, and results in the need for installation of new or modified domestic
661 wells and/or well-head treatment that provides acceptable quality groundwater.
- 662 • **Agricultural Users:** Irrigation water quality bears importantly on crop production and
663 has a variable impact on agriculture due to different crop sensitivities. Impacts from poor
664 water quality (e.g., elevated salinity) may include declines in crop yields, crop damage,
665 and alterations to the crops that can be grown in the area (e.g., depending on salt
666 tolerance).
- 667 • **Environmental Uses:** In gaining streams, poor quality groundwater may result in
668 contaminant migration which may impact groundwater dependent ecosystems or
669 instream environments, and the species therein.

670 **3.3.4.3 Relationship to Other Sustainability Indicators**

671 Groundwater quality does not typically influence other sustainability indicators, which are more
672 influenced by groundwater *quantity*. However, in some circumstances, groundwater quality can
673 be affected by changes in groundwater levels and reductions in groundwater storage, because
674 activities which alter basin groundwater flow patterns can also mobilize subsurface
675 contaminants.

- 676
- 677
- 678
- 679
- 680
- 681
- 682
- 683
- **Groundwater Levels:** In some instances, declining groundwater levels can potentially lead to increased concentrations of constituents of concern in groundwater and may alter the existing hydraulic gradient, which can result in the movement of contaminated groundwater plumes. Changes in groundwater levels may also mobilize some contaminants that may be present in unsaturated soils. In such cases, the MTs established for groundwater quality may influence groundwater level minimum thresholds by limiting the location or number of projects (e.g., groundwater recharge), to avoid degradation of groundwater quality.
- 684
- 685
- 686
- 687
- 688
- **Groundwater Storage:** Groundwater quality is not a primary driver of groundwater use in the basin and is therefore not directly related to groundwater storage. The groundwater quality MTs will not cause groundwater pumping to exceed the basin sustainability yield³ and therefore will not cause exceedances of the groundwater storage minimum thresholds.
- 689
- 690
- 691
- 692
- **Depletion of Interconnected Surface Waters:** The groundwater quality MT does not promote additional pumping or lower groundwater levels near interconnected surface waters. The groundwater quality MT does not negatively affect interconnected surface waters.
- 693
- **Seawater Intrusion:** This sustainability indicator is not applicable in the SV Subbasin.
- 694
- 695
- 696
- 697
- 698
- 699
- 700
- **Subsidence:** The groundwater quality MT does not promote additional pumping or lower groundwater levels and therefore does not interfere with subsidence minimum thresholds. In some cases, and depending on the basin's subsurface composition, extreme land subsidence (e.g., similar to rates in California's Central Valley) can lead to elevated arsenic concentrations (Smith et al., 2018), although this effect is not expected in the SV Subbasin because the basin pumping is moderate and **subsurface arsenic-rich clays are not abundant**.

701 **3.3.4.4 Information and Methodology Used to Establish Maximum Thresholds and**

702 **Measurable Objectives**

703 The two constituents of concern (nitrate and TDS) for which SMCs were considered were

704 specifically selected due to stakeholder input and prevalence as a groundwater contaminant in

705 California. Constituents of concern were identified using current and historical groundwater

706 quality data; this list may be reevaluated during future GSP updates. In establishing MTs for

707 groundwater quality, the following information was considered:

- 708
- 709
- 710
- 711
- 712
- 713
- 714
- 715
- 716
- Feedback about water quality concerns from stakeholders.
 - An assessment of available historical and current groundwater quality data from wells in the Subbasin.
 - An assessment of historical compliance with federal and state drinking water quality standards and water quality objectives.
 - An assessment of trends in groundwater quality at selected wells with adequate data to perform the assessment.
 - Information regarding sources, control options and regulatory jurisdiction pertaining to constituents of concern.

³ This will be confirmed by the integrated hydrologic model and updated as needed.

- 717
- Input from stakeholders resulting from the consideration of the above information in the
- 718 form of recommendations regarding MTs and associated management actions.

719 The historical and current groundwater quality data used to establish groundwater quality MTs
720 are discussed in **Section 2.2.2.4**. Based on a review of these data, applicable water quality
721 regulations, Subbasin water quality needs, and information from stakeholders, the GSAs
722 determined that state drinking water standards (MCLs and Water Quality Objectives) are
723 appropriate to define MTs for groundwater quality (**Table 3.3.4-1**). Hence, MTs for groundwater
724 quality are set to the Title 22 primary MCL for nitrate (10 mg/L), and the Title 22 secondary MCL
725 for TDS (500 mg/L). These MTs protect and maintain groundwater quality for existing and
726 potential beneficial uses and users.

727 New constituents of concern may be added with changing conditions and as new information
728 becomes available.

729 **3.3.4.5 Maximum Thresholds**

730 MTs for groundwater quality were defined in consultation with the GSA advisory committee and
731 stakeholders, and consider historical and present day groundwater quality data, beneficial uses
732 of groundwater in the SV Subbasin, and existing regulations (**Section 2.2.2.4**). Existing
733 regulations include water quality objectives in the Basin Plan, Title 22 Primary MCLs, and
734 Secondary MCLs. As a result of this process, SMCs were developed for two constituents of
735 concern in the Subbasin: nitrate, and TDS.

736 Although MTBE is identified as a potential constituent of concern in **Section 2.2.2.4**, no SMC is
737 defined for this constituent as it is associated with contaminated sites that have dedicated
738 monitoring and cleanup and is not likely a risk for future contamination. Recent MTBE data
739 (2016-2020) resulted in no exceedances of the 5 µg/L SMCL; the highest concentration
740 measured during this period was 0.7 µg/L. Arsenic, boron, iron, manganese, and pH were not
741 assigned SMCs because they are naturally occurring, although they will be monitored as part of
742 the GSP and Basin Plan.

743 The selected MTs for the concentration of TDS and nitrate, and their associated regulatory
744 thresholds, are listed in **Table 3.3.4-1**. Importantly, ***Undesirable Results for groundwater
745 quality occur when any well in the RMP exceeds MTs for nitrate or TDS at a number of
746 wells greater than the number of wells that show exceedances at the time of writing
747 (2021-09-01)***. Exceedances already exist at some RMPs and these exceedances will likely
748 continue into the future. The MT for the number of allowed exceedance wells is therefore equal
749 to the current number of wells with exceedances (none for nitrate, and three for TDS). The
750 identification of Undesirable Results is therefore based on the *number* of wells to have
751 exceedances for each nitrate and TDS, not necessarily the *same* wells. As denoted in
752 **Table 3.3.4-1** and **Table 3.3.4-2**, there are no wells with exceedances of the nitrate MT, and
753 three wells with exceedances of the TDS MT. For example, an MTs for nitrate and TDS are zero
754 and three wells respectively, and an Undesirable Result would occur if one well showed a
755 nitrate exceedance, or if four wells showed a TDS exceedance.

756 An average of water quality samples will be used for wells that are measured more than once a
757 year. As MTs are currently based on only existing wells, the water quality monitoring network
758 will be reassessed every five years to identify any new wells that should be added to the
759 network. If future water quality data collected from the network results in exceedances of MCLs
760 and SMCLs of additional constituents, MTs and MOs will be developed for these additional
761 constituents.

762 As described in **Section 3.4.1.3**, the groundwater quality monitoring network is not currently
 763 finalized for this GSP due to data gaps in well construction information, and inadequate spatial
 764 coverage. However, an initial analysis of water quality data for the proposed network was
 765 conducted to establish the interim MTs and MOs that will be updated once the data gaps are
 766 filled and a more complete assessment of this monitoring network can be established.

767 **3.3.4.5.1 Triggers**

768 The GSAs will use concentrations of the identified constituents of concern (nitrate and TDS)
 769 below the MT as triggers for action to proactively avoid the occurrence of undesirable results.
 770 Triggers are warning concentrations defined to indicate that groundwater quality degradation
 771 may be occurring, and that additional attention or action may be needed to avoid an increase to
 772 the MT. If the triggers are exceeded, the GSAs will conduct an investigation and may use
 773 management actions. As listed in **Table 3.3.4-1** the trigger value for TDS is 55% of the Title 22
 774 Secondary MCL (275 mg/L), while the trigger values for nitrate are half and 90% of the Title 22
 775 MCL (5 mg/L and 9 mg/L, respectively).

776 **3.3.4.5.2 Method for Quantitative Measurement of Maximum Thresholds**

777 Groundwater quality will be measured in representative monitoring wells as discussed in
 778 **Section 3.4.1.3**. Statistical evaluation of groundwater quality data obtained from the monitoring
 779 network will be performed. The MTs for constituents of concern are shown in **Table 3.3.4-1** and
 780 Figure 3.3.4-1, which show “rulers” for each of the two identified constituents of concern, with
 781 the associated MTs, MOs, and triggers. MOs are detailed in the following subsection.


782 **Table 3.3.4-1. Constituents of Concern and the Associated Maximum Thresholds and Triggers**

Constituent	Maximum Threshold (MT)	Regulatory Threshold	Maximum Threshold, Number of Wells Exceeding MT Concentration
Nitrate as Nitrogen	<i>5 mg/L, trigger only</i>	10 mg/L (Primary MCL – Title 22)	0
	<i>9 mg/L, trigger only</i>		
	10 mg/L, MT		
Total Dissolved Solids (TDS)	<i>275 mg/L, trigger only</i>	500 mg/L (Secondary MCL – Title 22)	3
	500 mg/L, MT		


783
784
785

Figure 3.3.4-1. Degraded water quality rulers for the constituents of concern in the Sierra Valley Subbasin (Measurable objectives are provided as an example and are specific to each well in the monitoring network)

Nitrate as Nitrogen

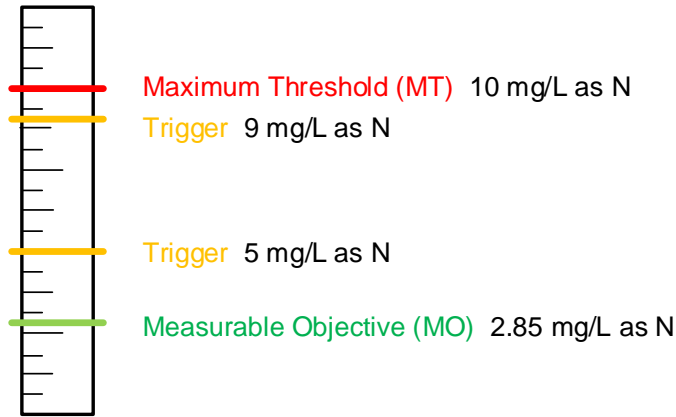

Total Dissolved Solids

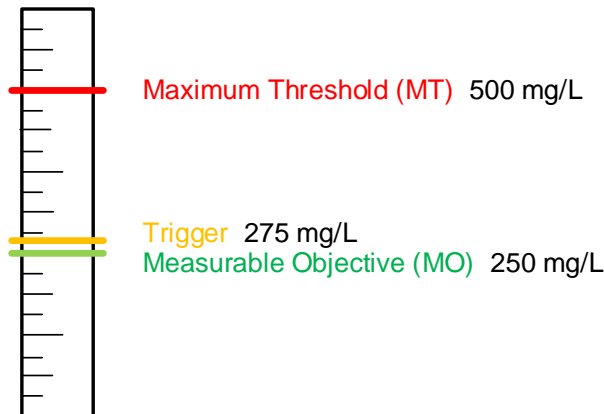

786 **3.3.4.6 Measurable Objectives**

787 MOs are defined under SGMA as described previously in **Section 3.1** and represent the desired
788 condition to be achieved to satisfy each Sustainability Indicator. Within the Subbasin, the MOs
789 for water quality are established to provide an indication of desired water quality at levels that
790 are sufficiently protective of beneficial uses and users. MOs differ from triggers in that they
791 define concentrations that will allow the Subbasin to achieve its sustainability goal within
792 20 years of Plan implementation. For nitrate and TDS, MOs are defined on a well-specific basis,
793 with consideration for historical water quality data.

794 **3.3.4.6.1 Description of Measurable Objectives**

795 The MOs for wells within the water quality monitoring network where concentrations have
796 historically been below the MTs for water quality, are the highest measured concentrations
797 during the period 1990 to July 2020. For wells where the concentrations have historically
798 exceeded or equaled 90% of the MT, the MO is instead 90% of the MT. For newly installed or
799 newly monitored wells, the MO will be preliminarily set to the first measured concentration until
800 more data is available to set more informed SMC. As with wells that have historically been

801 monitored, if this concentration exceeds or equals 90% of the MT, the MO will instead be 90%
802 of the MT. In instances where the highest measured concentration of nitrate is a non-detect
803 value, the MO is defined as 0.05 mg/L.

804 Specifically, for nitrate and TDS, the MO for the monitoring network is for individual wells not to
805 exceed the MO for two consecutive years. The MOs for nitrate and TDS at proposed
806 representative monitoring points within the SV Subbasin are listed in **Table 3.3.4-2**.

807 **3.3.4.7 Path to Achieve Measurable Objectives**

808 The GSAs will support the protection of groundwater quality by monitoring groundwater quality
809 conditions and coordinating with the relevant regulatory agencies that work to maintain
810 groundwater quality in the Subbasin. All future projects and management actions will be
811 implemented by the GSAs with the intent to comply with state and federal water quality
812 standards and Basin Plan water quality objectives and will be designed to maintain groundwater
813 quality for all uses and users and avoid causing unreasonable groundwater quality degradation.
814 The GSAs will review and analyze groundwater monitoring data as part of GSP implementation
815 to evaluate any changes in groundwater quality resulting from groundwater pumping or
816 recharge projects (anthropogenic recharge) in the Subbasin. The need for additional studies on
817 groundwater quality will be assessed throughout GSP implementation. The GSAs may identify
818 data gaps, seek funding, and help to implement additional studies.

819 Using monitoring data collected as part of project implementation, the GSAs will develop
820 information (e.g., time-series plots of water quality constituents) to demonstrate that projects
821 and management actions are operating to maintain or improve groundwater quality conditions in
822 the Subbasin and to avoid unreasonable groundwater quality degradation. Should the
823 concentration of a constituent of concern increase above its MO or trigger value as the result of
824 GSAs project implementation, the GSAs will implement measures to address this occurrence.
825 This process is illustrated in **Figure 3.3.4-2**, and depicts the high-level decision making that
826 goes into developing SMCs, monitoring to determine if criteria are met, and actions to be taken
827 based on monitoring results

828 If a degraded water quality trigger is exceeded, the GSAs will investigate the cause and source
829 and implement management actions as appropriate. Where the cause is known, projects and
830 management actions along with stakeholder education and outreach will be implemented.
831 Examples of possible GSAs actions include notification and outreach to impacted stakeholders,
832 alternative placement of groundwater recharge projects, and coordination with the appropriate
833 water quality regulation agency. Projects and management actions are presented in further
834 detail in **Chapter 4**.

835 Exceedances of nitrate, and TDS will be referred to the Regional Board. Where the cause of an
836 exceedance is unknown, the GSAs may choose to conduct additional or more frequent
837 monitoring.

838
839

Table 3.3.4-2. Potential Groundwater Quality Monitoring Wells and Associated Measurable Objectives

Well Description	Well ID	Measurable Objectives (mg/L)		Notes
		Nitrate as Nitrogen	TDS	
Potential (GAMA)	21N14E15J001M	0.05 ^(a)	269	
Potential (GAMA)	21N14E32G001M	0.07	172	
Potential (GAMA)	21N15E05D001M	0.05 ^(a)	450 ^(b)	
Potential (GAMA)	22N15E21K001M	0.05 ^(a)	450 ^(b)	
Potential (GAMA)	22N15E35H001M	0.05 ^(a)	175	
Potential (GAMA)	3200020-001	0.13	N/A	No historical monitoring of TDS, measurable objectives to be defined after monitoring begins
Potential (GAMA)	3200138-001	1.4	252	
Potential (GAMA)	3200193-001	0.4	450 ^(b)	
Potential (GAMA)	3200618-002	2.85	190	
Potential (GAMA)	4600003-001	0.5	N/A	No historical monitoring of TDS, measurable objectives to be defined after monitoring begins
Potential (GAMA)	3200171-001	0.5	N/A	No historical monitoring of TDS, measurable objectives to be defined after monitoring begins
Potential (GAMA)	4600009-002	1.0	197	
Potential (GAMA)	4600037-001	0.5	N/A	No historical monitoring of TDS, measurable objectives to be defined after monitoring begins
Potential (GAMA)	4600083-001	0.75	N/A	No historical monitoring of TDS, measurable objectives to be defined after monitoring begins
Potential (GAMA)	4600092-001	0.5	169	
Potential (GAMA)	4610001-002	0.5	200	
Potential (GAMA)	4610001-004	0.5	234	
Community Volunteer Wells (8 potential wells)	N/A	N/A	N/A	Measurable objectives to be defined after monitoring begins
DWR New Installation	N/A	N/A	N/A	Measurable objectives to be defined after monitoring begins
5x New GSP Monitoring Wells to Cover Spatial Gaps	N/A	N/A	N/A	Measurable objectives to be defined after monitoring begins

840
841
842

^(a) N measurable objective set to 0.05 mg/L due to no detected concentrations in historical results


^(b) TDS measurable objective set to 90% of maximum threshold due to historical exceedance of this value

N/A = the well has not been identified, and therefore historical monitoring data is not yet available

843 3.3.4.7.1 *Interim Milestones*

844 As existing groundwater quality data indicate that groundwater in the Subbasin generally meets
 845 applicable state and federal water quality standards for nitrate and TDS, the objective is to
 846 maintain existing groundwater quality. Interim milestones are therefore set to maintain
 847 groundwater quality equivalent to the MOs established for nitrate and TDS, with the goal of
 848 maintaining water quality within the historical range of observed values.

849 **Figure 3.3.4-2. Degraded water quality sustainable management criteria flow chart**

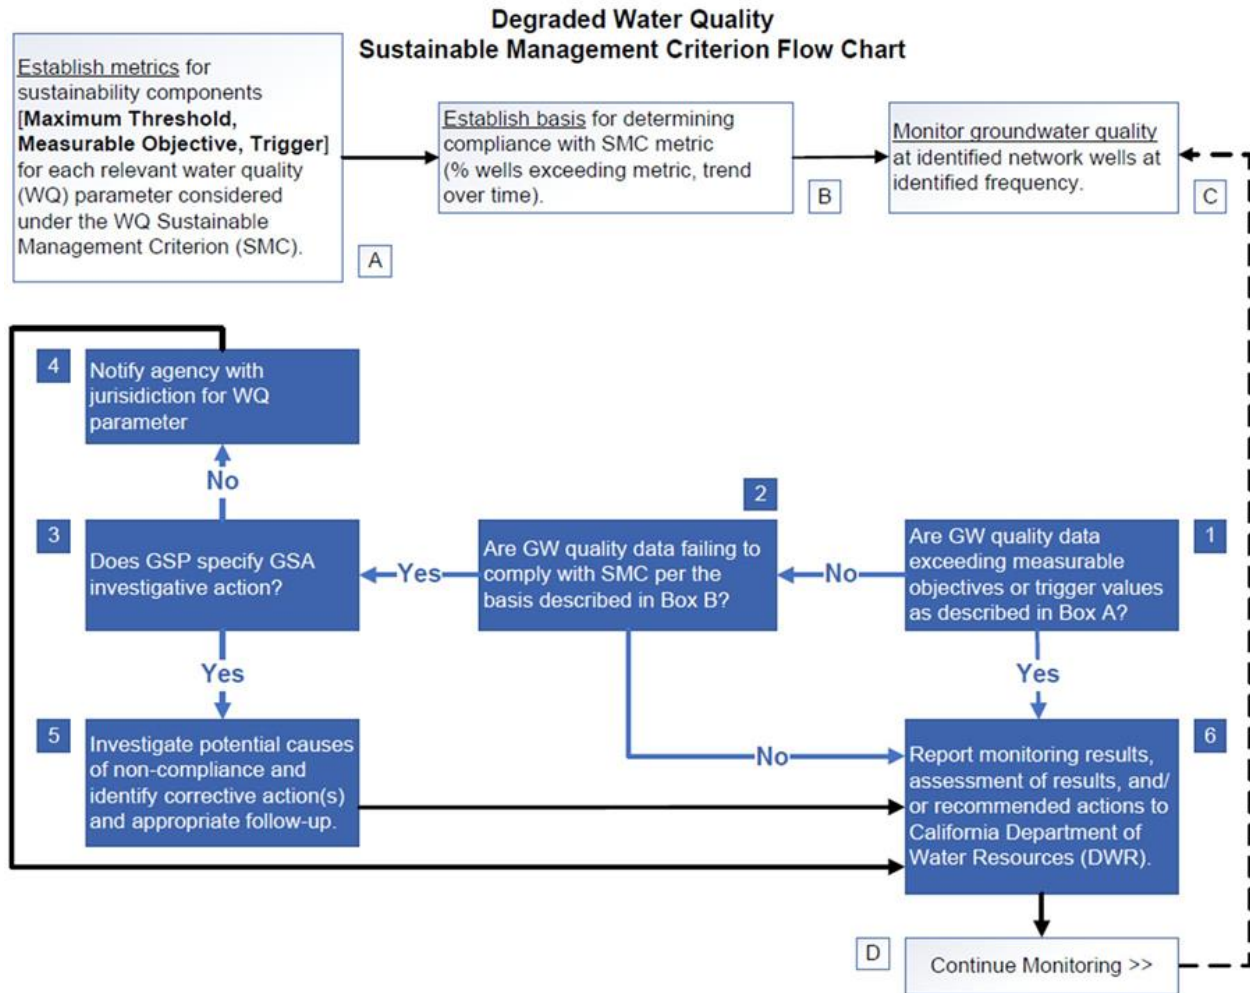

850 The flow chart depicts the high-level decision making that goes into developing SMCs,
 851 monitoring to determine if criteria are met, and actions to be taken based on monitoring results.

852 **3.3.5 Land Subsidence**

853 Sierra Valley has experienced land subsidence in the past and some land subsidence continues
 854 into the present day. Subsidence has occurred in varying areas in Sierra Valley over time, and
 855 has overlapped with areas of significant groundwater pumping. The Sierra Valley subsurface
 856 geology is typical of Californian mountain valleys, and predominantly composed of eroded,
 857 alluvial, sedimentary deposits (e.g., clay, silt, sand, and gravel). The clay deposits are

858 particularly susceptible to inelastic compression resulting in land subsidence when significant
859 levels of drawdown have occurred.

860 Average annual subsidence in the Subbasin has been estimated by various studies (Table ##).
861 The first recorded account of subsidence in Sierra Valley was by the California Department of
862 Water Resources (DWR; 1983). DWR (1983) and Plumas County Road Department surveys
863 reported localized groundwater level decline and corresponding inelastic subsidence of about
864 1 to 2 feet between 1960 and 1983 (i.e., an effective annual subsidence rate of about 0.05 to
865 0.1+ feet/year). Subsidence from 1983 to 2012 is unknown as records during this time are not
866 available. During the severe 2012 to 2016 drought, the California Department of Transportation
867 (CalTrans) surveyed areas of heavy groundwater pumping and water level drawdown and
868 estimated subsidence of 0.3 to 1.9 feet (i.e., approximately 0.08 to 0.48 feet/year). These results
869 agree with another estimate made between 2015 and 2016: satellite-based Interferometric
870 Synthetic Aperture Radar (InSAR) data from NASA JPL suggested subsidence in the
871 northeastern Sierra Valley of up to 0.5 feet/year (insert reference). From March of 2015 to
872 November 2019, the same NASA JPL InSAR data suggests up to 1.2 feet of subsidence (i.e.,
873 about 0.3 feet/year). During the same period, DWR/TRE by Altamira (2020), estimated 0.15 ±
874 0.1 feet/year of subsidence – about half the land subsidence estimated by NASA JPL.

875 **TABLE ##: Estimated average annual subsidence in the Subbasin as measured by**
876 **various studies**

Study or Entity Reporting Subsidence	Date Range	Average Annual Subsidence (estimate)
DWR (1983) and Plumas County Road Department	1960 – 1983	0.05 to >0.1 feet/year
CalTrans	2012 – 2016	0.08 to 0.48 feet/year
NASA JPL, InSAR	2015 - 2016	Up to 0.5 feet/year
NASA JPL, InSAR	March 2015 to November 2019	0.3 feet/year
DWR/TRE by Altamira (2020)	March 2015 to November 2019	0.15 to >0.1 feet/year

877

878

879 **3.3.5.1 Undesirable Results (Reg. § 354.26)**

880 An undesirable result occurs when subsidence substantially interferes with beneficial uses of
881 groundwater and surface land uses. Subsidence occurs when excessive groundwater pumping
882 dewateres typically fine-grained sediments (e.g., clays and silts) causing them to compact, either
883 temporarily (elastic subsidence) or permanently (inelastic subsidence). Clay and silt sediments
884 are only moderately present in the eastern side of the Subbasin. Areas of differential
885 subsidence, where subsidence transitions from little to moderate over a short lateral distance,
886 are of particular concern because they can impact infrastructure along this this transition zone.
887 Differential subsidence prone areas include zones along faults where drawdown effects are
888 localized to one side of the fault, and zones of rapid transition from fine to coarse grained
889 sediments, such as near alluvial fan transitions to valley floor sediments. Specific examples of
890 undesirable results include substantial interference with land use, and significant damage to
891 critical infrastructure, such as building foundations, roadways, railroads, canals, pipes, and
892 water conveyance.

893 **3.3.5.2 Effects on Beneficial Uses and Users**

894 Potential effects on the beneficial uses and users of groundwater, on land uses and property
895 interests, and other potential effects that may occur or are occurring from undesirable results
896 related to subsidence could be:

- 897 • Financial impacts to all groundwater users and well owners for mitigation costs and
898 supplemental supplies (including de minimis groundwater users and members of
899 disadvantaged communities).
- 900 • Impacts to shallow wells (<100 ft deep) due to potentially degraded water quality,
901 requiring well treatment or abandonment.
- 902 • Land subsidence causing detrimental impacts to infrastructure (sinking roads, inefficient
903 surface water delivery), private structures, and/or land uses.
- 904 • Irreversible losses to aquifer storage permeability and storage capacity.
- 905 • Damage to wells (subsidence can cause wellhead damage or casing failure).

906 *[The remaining subsidence sections may be updated based on recent subsidence data and*
907 *stakeholder input]*

908 **3.3.5.3 Relationship to Other Sustainability Indicators**

909 Land subsidence does not typically influence other sustainability indicators, but is rather
910 influenced directly by chronic lowering of groundwater levels and chronic reduction in
911 groundwater storage. However, recent scientific research suggests that land subsidence in low-
912 permeability silts and clays may mobilize arsenic (Smith et al, 2018).

- 913 • **Groundwater Levels:** In the Sierra Valley, groundwater levels are primarily controlled
914 by pumping and recharge. Groundwater level decline can remove groundwater from
915 saturated pore spaces – this depressurizes sediments causing them to collapse, which
916 in turn causes the land surface to subside. Heterogeneous geology and different patterns
917 of groundwater pumping across space drive differential groundwater level decline across
918 and throughout the Sierra Valley aquifer-aquitard system. Land subsidence is influenced
919 by differential groundwater decline and is therefore also heterogeneous across the
920 landscape. Depending on the sediments present and magnitude of subsidence, some
921 subsidence is reversible (elastic) following an increase in groundwater level, whereas at
922 other times subsidence is irreversible (inelastic) and results in a permanent loss of
923 groundwater storage capacity. It is common for both inelastic and elastic subsidence to
924 be simultaneously present, but difficult in practice to estimate the relative contribution of
925 each because doing so requires extensive knowledge of hard-to-measure subsurface
926 geology.
- 927 • **Groundwater Storage:** Groundwater storage decline drives groundwater level decline,
928 which can cause land subsidence if the storage is extracted from sediments prone to
929 subsidence (i.e., typically fine grained clays and silts).
- 930 • **Depletion of Interconnected Surface Waters:** A direct connection to land subsidence
931 is less clear for ISW depletion. ISW losing streams that substantially recharge
932 subsurface aquifers may buffer against land subsidence due to nearby extraction,
933 although this contribution to the groundwater budget is localized to ISW areas and likely
934 less than other combined sources of recharge to the basin like irrigation return flow and
935 subsurface inflow.
- 936 • **Seawater Intrusion:** This sustainability indicator is not applicable in the SV Subbasin.

- 937
- 938
- 939
- 940
- 941
- **Groundwater Quality:** Smith et al (2018) demonstrated a relationship between land subsidence and arsenic-leaching from clays and silts in the Central Valley. The sedimentary, clastic, alluvial geology of Smith’s study site are similar to geologic conditions in the Sierra Valley, thus is it reasonable to monitor Arsenic concentrations near anticipated zones of land subsidence.

942 By managing groundwater pumping and avoiding chronic lowering of groundwater levels
943 (**Section 3.3.1**), land subsidence, and possible water quality impacts resulting from such
944 subsidence will also be mitigated.


945 **3.3.5.4 Information and Methodology Used to Establish Minimum Thresholds and**
946 **Measurable Objectives (Reg. § 354.30)**

947 Although InSAR satellite-based measures of land subsidence are available for the SV Subbasin,
948 these data are relatively recent, do not show long-term trends, and indicate total subsidence
949 which represent a combination of elastic (reversible) subsidence and inelastic (irreversible)
950 subsidence. Furthermore, ground-based data do not conclusively determine the extent of long-
951 term, inelastic subsidence. As such, adequate, Subbasin-specific information correlating the
952 detailed, long-term connection between land subsidence and groundwater levels is lacking.

953 Poland and Davis (1969) estimated the land subsidence to groundwater level decline ratio in the
954 Sierra Valley as approximately 0.01 to 0.2 feet of subsidence per foot of groundwater level
955 decline. Assuming a worst-case scenario in which 100% of RMPs simultaneously reach MTs,
956 maximum potential groundwater level declines past historic lows were calculated. Next, the
957 potential range of land subsidence for this worst-case scenario was calculated using the ratio
958 provided by Poland and Davis (1969), and ranges from 0 to 2.55 feet depending on the location
959 in the basin (**Figure 3.3.5-1**). Larger distance between recent historic lows (around fall 2015)
960 and groundwater level MTs leads to increased estimated land subsidence. **At this time,**
961 **significant and unreasonable impacts to beneficial uses and users are not anticipated under**
962 **these land subsidence estimates and hence, the avoidance of land subsidence is achieved via**
963 **management of groundwater levels above MTs [Figure 3.3.5.-1 requires TAC input. If the TAC**
964 **can define a range of maximum allowable subsidence, MTs can be raised at RMPs**
965 **accordingly.].** Importantly, due to the relatively long-time scales on which land subsidence
966 occurs, land subsidence should be monitored, used to validate the work of Poland and Davis
967 (1969), and adaptively managed. Impacts to arsenic in groundwater, and damage to physical
968 infrastructure is of particular concern in the basin and will also be monitored.

969
970

Figure 3.3.5-1: Minimum (left) and maximum (right) range of land subsidence implied by the change in groundwater level between recent historic lows (fall 2015) and groundwater level MTs.

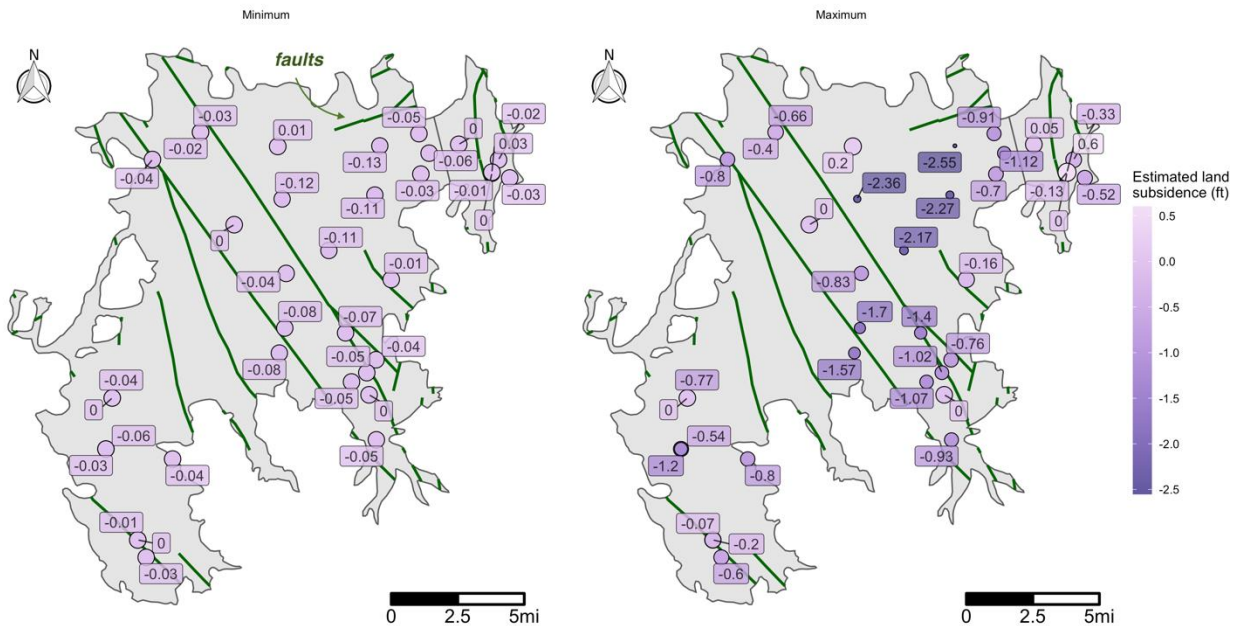

971 Currently, groundwater levels and the correlations established by Poland and Davis (1969) offer
 972 the best-available information to estimate potential land subsidence for the Subbasin. For the
 973 first five years, the GSP will use groundwater elevation proxy for land subsidence. Within the
 974 first five years of plan implementation, effort will be made to demonstrate more robust
 975 correlations with different subsidence data types, and an adaptive methodology for assessing
 976 land subsidence will be developed to supplement the groundwater level proxy. This will
 977 incorporate groundwater levels, ground-based elevation surveys, and satellite-based InSAR
 978 data.

979 **3.3.5.5 Minimum Thresholds (Reg. § 354.28)**

980 The Sierra Valley basin lacks detailed information regarding aquifer lithology, aquitard units, and
 981 long-term land-subsidence trends. Satellite-based InSAR data are useful for assessing total
 982 land subsidence, these data have only been processed for 2015-2019. It is assumed that
 983 InSAR data will continue to be collected from agencies operating satellites during the
 984 implementation period by DWR. These measurements will be coupled with groundwater
 985 elevation and ground-based survey data to inform adaptive management and the development
 986 of more refined MTs in the next 5 year plan update.

987 23 CCR § 354.28(d) states: “An Agency may establish a representative MT for groundwater
 988 elevation to serve as the value for multiple sustainability indicators, where the Agency can
 989 demonstrate that the representative value is a reasonable proxy for multiple individual MTs as
 990 supported by adequate evidence.”

991 This GSP adopts groundwater level as a proxy for changes in land subsidence, using evidence
 992 of a linear and physical relationship between land subsidence and groundwater level change
 993 documented by Poland and Davis (1969) and detailed in **Section 3.3.5.4**. Groundwater levels
 994 are a useful “lever” to control land subsidence, **and estimated worst-case land subsidence**

995 (Figure 3.3.5-1) is not determined to be significant and unreasonable. Hence, managing
996 groundwater levels above MTs also protects against significant and unreasonable land
997 subsidence (needs to be revisited after TAC input). Thus, the MT for land subsidence for this
998 GSP is the same as the MT for groundwater levels as detailed in **Section 3.3.1.4**. There are
999 currently no other state, federal, or local standards that relate to this sustainability indicator in
1000 the Subbasin.

1001 **3.3.5.6 Measurable Objectives**

1002 Using groundwater level as a proxy, the MOs and IMs for land subsidence for this GSP are
1003 identical to groundwater level MOs and IMs, as detailed in **Section 3.3.1.4**. Protecting against
1004 chronic lowering of groundwater levels will directly protect against land subsidence.

1005 **3.3.5.7 Path to Achieve Measurable Objectives**

1006 GSAs will continue to monitor groundwater elevation and combine these data with InSAR and
1007 ground-based elevation surveys to measure progress towards MOs and to improve
1008 understanding of land subsidence in the basin. GSAs will coordinate with the relevant
1009 stakeholders to determine impacts to beneficial users and uses that may be impacted by land
1010 subsidence and take necessary actions to adaptively manage groundwater pumping and avoid
1011 significant and unreasonable impacts. Beyond these actions, the GSAs will approach
1012 groundwater level management as described in **Section 3.3.1.6**.

1013 **3.4 Monitoring Networks (Reg. § 354.26)**

1014 Monitoring is fundamental to measure progress towards Plan management goals. The
1015 monitoring networks described in this subsection support data collection to monitor the SV
1016 Subbasin's sustainability indicators which include the lowering of groundwater levels, reduction
1017 of groundwater storage, depletion of interconnected surface water, degradation of water quality,
1018 and land subsidence. Monitoring data will be used to track spatial and temporal changes in
1019 groundwater conditions that may result from projects and actions that are part of GSP
1020 implementation.

1021 Per 23 CCR § 354.34, monitoring networks should be designed to:

- 1022 • Demonstrate progress towards achieving MOs described in the Plan,
- 1023 • Monitor impacts to the beneficial uses or users of groundwater,
- 1024 • Monitor changes in groundwater conditions relative to MOs and minimum or maximum
1025 thresholds; and,
- 1026 • Quantify annual changes in water budget components.

1027 The monitoring network will have sufficient spatial density and temporal resolution to evaluate
1028 the effects and effectiveness of plan implementation and represent seasonal, short-term, and
1029 long-term trends in groundwater conditions and related surface conditions. For the purposes of
1030 this Plan, short-term is considered a time span of 1 to 5 years, and long-term is considered to
1031 be 5 to 20 years. The spatial densities and frequency of data measurement are specific to the
1032 monitoring objectives, parameter measured, degree of groundwater use, and SV Subbasin
1033 conditions.

1034 Although "shallow" and "deep" aquifer terms have been historically used by DWR (the zone
1035 between "shallow" and "deep" roughly corresponding to around 300 feet), analysis of data from
1036 drilling records, water level response, groundwater chemistry and groundwater temperature
1037 studies do not necessarily indicate two distinctive aquifers throughout the groundwater

1038 Subbasin (see **Section 2.2.1.6**). Regardless, monitoring wells with adequate vertical distribution
1039 are selected as RMPs to capture “shallow” and “deep” zones of the production aquifer.

1040 This section describes the monitoring networks (existing and potential expansion) that will be
1041 used to track progress and characterize the subbasin under the GSP. The process and costs
1042 associated with network maintenance and expansion are described in Chapter 4, Projects and
1043 Management Actions in section 4.2.2.

1044 **Network Enrollment and Expansion**

1045 Except for streamflow, land subsidence, and ISW depletion due to groundwater pumping,
1046 monitoring is performed using networks of groundwater monitoring wells and surface water
1047 monitoring stations. In the case of land subsidence and ISW depletion, although other
1048 monitoring and assessment approaches exist (i.e., InSAR and elevation surveys; modeled ISW
1049 depletion rates and volumes), groundwater level will also be used as a proxy. Thus,
1050 groundwater monitoring wells are critical.

1051 Some groundwater wells will be monitored for water level, some for water quality, and some will
1052 be monitored for both. Each monitoring well in the network will be modified throughout GSP
1053 implementation as necessary to address monitoring objectives and support projects and
1054 management actions. Expansion of networks will involve identifying existing wells in the
1055 Subbasin that can potentially be added to the network, applying selection criteria, and ultimately
1056 approving the well for inclusion.

1057 Evaluation of the monitoring networks will be conducted at least every 5 years to determine
1058 whether additional wells are required to achieve sufficient spatial density, whether wells are
1059 representative of Subbasin conditions, and whether wells cover key areas identified by
1060 stakeholders. Prior to enrolling wells into the GSA’s monitoring network, wells are evaluated
1061 using the following selection criteria: well location, monitoring history, well information, and well
1062 access. These criteria are discussed below.

1063 *Well Location*

1064 Objectives for network design include sufficient coverage, density, and distribution of wells to
1065 monitor groundwater storage, flow directions, and hydraulic gradients. Where monitoring wells
1066 are not present, statistical methods are used to aid in extrapolating data from existing
1067 monitoring sites to the entire Subbasin. Beyond capturing general hydrologic trends in the
1068 Subbasin, it is important to monitor planned GSP projects and management actions, and
1069 locations where existing or legacy operations may threaten groundwater quality for beneficial
1070 uses and users.

1071 *Monitoring History*

1072 Wells with a long monitoring record provide valuable historical groundwater level and water
1073 quality data and enable the assessment of long-term trends. Such wells are preferentially
1074 selected over wells with limited monitoring data.

1075 *Well Information*

1076 Well construction information including well depth and screened interval are essential to
1077 interpret monitoring results and ensure adequate vertical monitoring coverage of the aquifer. At
1078 a minimum, selected wells should have well depth information. Although the perforated interval
1079 is not available for all wells, it is essential to include these wells as potential wells to provide
1080 adequate lateral coverage. For these wells, the GSAs will work to collect well information with
1081 site surveys during the first year of GSP implementation as outlined in Chapter 5 (GSP
1082 Implementation).

1083 *Well Access/Agency Support*

1084 Ability to gain access to a well to collect samples at the required frequency is critical. When
 1085 necessary, the GSAs will coordinate with existing programs to develop an agreement for data
 1086 collection responsibilities, monitoring protocols, and data reporting and sharing. For existing
 1087 monitoring programs implemented by agencies, monitoring will be conducted by agency
 1088 program staff or their contractors. For groundwater elevation monitoring, a subset of wells
 1089 included in the California Statewide Groundwater Elevation Monitoring (CASGEM) Program for
 1090 Plumas County and Sierra County was selected and incorporated to the GSP monitoring
 1091 network administered by the GSA. For water quality monitoring, samples will be analyzed at
 1092 contracted analytical laboratories.

1093 **3.4.1 Monitoring Networks in the Subbasin**

1094 Based on the SV Subbasin’s historical and present-day conditions (**Section 2.2.2**), the
 1095 sustainability indicators that will be monitored include groundwater level and storage,
 1096 interconnected surface water, groundwater quality, and land subsidence. Seawater intrusion is
 1097 not found in the Subbasin and is therefore not monitored (23 CCR § 354.34(j)). Existing and
 1098 planned spatial density, and data collection frequency is now described for each monitoring
 1099 network. Descriptions, assessments, and plans for future improvement of the well monitoring
 1100 networks, along with protocols for data collection and monitoring are addressed for each
 1101 sustainability indicator in its corresponding subsection.

1102 As listed in **Table 3.4.1-1** there are four monitoring networks: a water level monitoring network,
 1103 a streamflow depletion monitoring network, a land subsidence monitoring system, and water
 1104 quality monitoring network (groundwater storage is monitored using the same wells included in
 1105 the groundwater elevation monitoring network). The water level and water quality networks are
 1106 independent but utilize some of the same wells. The land subsidence monitoring system utilizes
 1107 satellite remote sensing along with land-based survey monuments, and the streamflow
 1108 depletion monitoring network utilizes wells, streamflow gauges, and integrated hydrological
 1109 model estimates adapted throughout the implementation period based on available data and
 1110 tools.

1111 **Table 3.4.1-1. Summary of monitoring networks, metrics,**
 1112 **and number of sites for sustainability indicators**

Sustainability Indicator ⁽¹⁾	Metric	Number of RMPs in Current Network
Chronic Lowering of Groundwater Levels ⁽²⁾	Groundwater level	36
Reduction of Groundwater Storage	Groundwater level as proxy; volume of water per year, computed by the forthcoming regional groundwater flow model	Uses chronic lowering of groundwater levels network
Stream Depletion due to Groundwater Pumping	Groundwater level as proxy; and ISW depletion rate and volume computed by the forthcoming regional groundwater flow model. Additionally, vertical hydraulic gradients will be measured at multi-completion wells and streamflow will be measured at stream gages.	13

Sustainability Indicator ⁽¹⁾	Metric	Number of RMPs in Current Network
Groundwater Quality	Concentration of selected water quality parameters	17 confirmed; 14 pending (Table 3.3.4-2)
Land Subsidence	Groundwater level as proxy; DWR's vertical displacement estimates derived from Interferometric Synthetic Aperture Radar (InSAR) data ⁽³⁾	Spatially continuous

1113 ⁽¹⁾ This table only includes monitoring networks used to measure sustainability indicators. It does not include
 1114 additional monitoring necessary to monitoring the various water budget components of the Subbasin, described
 1115 in Chapter 2, or to monitoring the implementation of projects and management actions, which are described in
 1116 Chapter 4.

1117 ⁽²⁾ The groundwater level monitoring network is also used for non-riparian groundwater dependent ecosystems.

1118 ⁽³⁾ Land surface elevation changes are monitored through satellite remote sensing will be sourced from DWR, or
 1119 evaluated independently in the absence of these data being readily available.

1120 **3.4.1.1 Groundwater Elevation Monitoring Network**

1121 The groundwater elevation monitoring network is designed to monitor groundwater occurrence,
 1122 level, flow directions, and hydraulic gradients between the aquifers and surface water bodies.

1123 The initial list of groundwater level monitoring wells included 130 wells. These wells were
 1124 narrowed down based on the following criteria:

- 1125 • Either depth or perforated interval are known, preferably both;
- 1126 • Measured water level data are available through at least 2019 (this criterion was relaxed
 1127 in locations where spatial coverage is lacking);
- 1128 • A preference was given to wells with data prior to 2005; and,
- 1129 • The well has at least five historical measurements.

1130 Annual pumping in the subbasin is between 1,000 and 10,000 acre-feet/year per 100 square
 1131 miles, resulting in a suggested density of 2 monitoring wells per 100 square miles to collect
 1132 representative groundwater elevation measurements (Hopkins 1984; DWR, 2016). Based on
 1133 this density consideration, and the Subbasin's surface area of 195.1 square miles (combined
 1134 area of the SV Subbasin and Chilcoot Subbasin), 4 monitoring wells are adequate to monitor
 1135 representative groundwater elevations within the Subbasin.

1136 Alternatively, Sophocleous (1983) estimates 6.3 monitoring wells are needed per 100 square
 1137 miles, resulting in 12.3 monitoring wells needed in the Subbasin (Sophocleous, 1983; DWR,
 1138 2016). Based on this estimate, 13 wells will sufficiently monitor the Subbasin's surface area of
 1139 195.1 square miles; equivalent to a lateral coverage of 15.0 square miles per well, or radius of
 1140 2.2-miles per well. The proposed groundwater elevation network (**Figure 3.4.1-1** and
 1141 **Table 3.3.1-1**) uses 36 monitoring wells and covers 82% of the Subbasin (160.4 of
 1142 195.1 square miles) according to spatial coverage estimates by Sophocleous (1983).

1143 As stated, although "shallow" and "deep" aquifer terms have been historically used by DWR,
 1144 analysis does not necessarily indicate the presence of two distinct aquifers throughout the
 1145 Subbasin (**Section 2.2.1.6**); however, wells are selected to provide **adequate vertical coverage**
 1146 throughout the aquifer to reflect trends in the depths that are pumped. Importantly, the proposed
 1147 monitoring well density is appropriate to extrapolate seasonal groundwater elevation maps to
 1148 support analysis of impacts to shallow domestic wells, GDE impact analysis, and to monitor

1149 seasonal changes in hydraulic gradients that may indicate changes in ISW depletion.
1150 Implementation actions are proposed to cover data gaps in the network and make
1151 improvements to existing RMPs

1152 Monitoring frequency is important to characterize groundwater and surface water dynamics.
1153 Wells will be measured at least biannually, in spring (mid-March) and fall (mid-October), in line
1154 with DWR Best Management Practices (DWR, 2016). Monitoring standards and conventions are
1155 consistent with 23 CCR § 352.4, which outline data and reporting standards for groundwater
1156 level measurements. To the extent that improved information is required on surface and
1157 groundwater interactions in the basin, continuous monitoring will be considered.

1158 *3.4.1.1.1 Protocols for Data Collection and Monitoring (23 CCR § 352.2)*


1159 This subsection briefly summarizes monitoring protocols. Groundwater level data collection may
1160 be conducted remotely via telemetry equipment, or with an in-person field crew. This subsection
1161 provides a brief summary of monitoring protocols. Establishment of protocols will ensure that
1162 data collected for groundwater elevation are accurate, representative, reproducible, and contain
1163 all required information. All groundwater data collection in support of this GSP is required to
1164 follow the established protocols for consistency throughout the basin and over time. These
1165 monitoring protocols will be updated as necessary and will be re-evaluated every five years. All
1166 groundwater elevation measurements are references to a consistent datum, known as the
1167 Reference Point (RP). For monitoring wells, the RP consists of a mark on the top of the well
1168 casing. For most production wells, the RP is the top of the well's concrete pedestal. The
1169 elevation of the RP of each well is surveyed to the National Geodetic Vertical Datum of 1929
1170 (NDVD 29). The elevation of the RP is accurate to at least 0.5 feet.

1171 Groundwater level measurements are taken to the nearest 0.01 foot relative to the RP using
1172 procedures appropriate for the measuring device. Equipment is operated and maintained in
1173 accordance with manufacturer's instructions, and all measurements are consistent units of feet,
1174 tenths of feet, and hundredths of feet.



1175
1176
1177

Figure 3.4.1-1. RMPs for the Groundwater Level Monitoring Network
(Network coverage is depicted with blue, circular 15.0 square mile buffers around each monitoring point that show the 82% lateral coverage of the network)

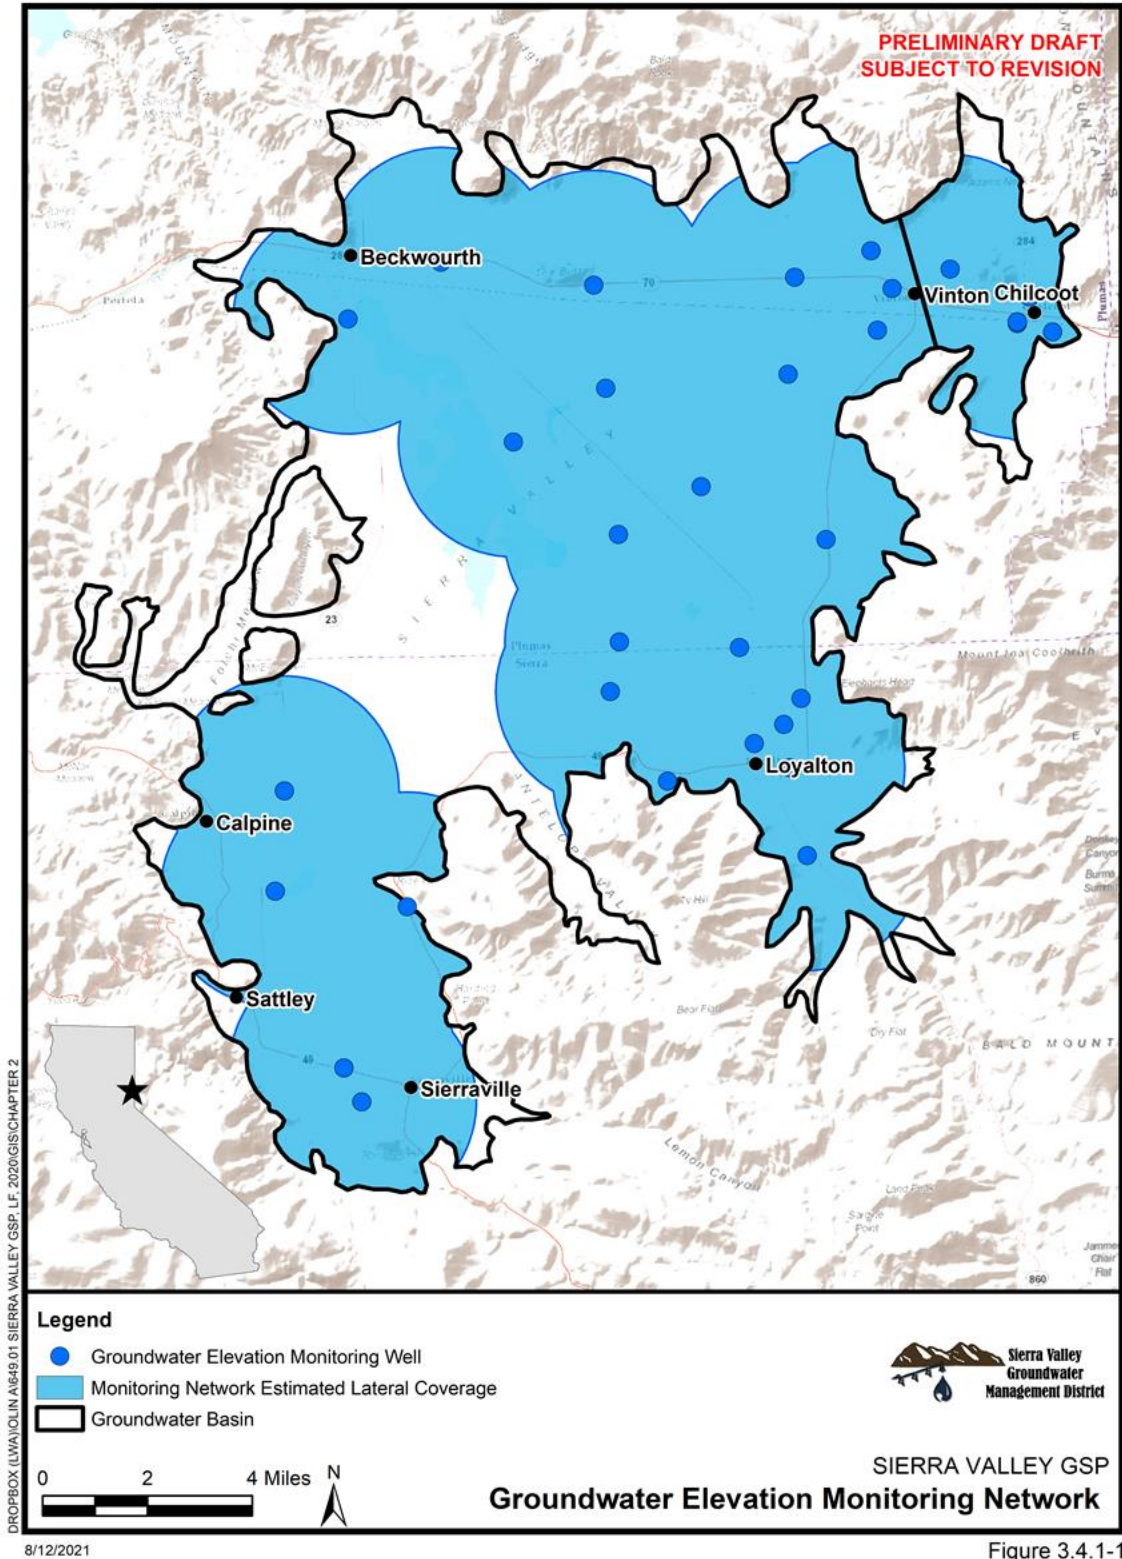

1178 Groundwater elevation is calculated using the following equation:

1179
$$GWE = RPE - DTW$$

1180 Where GWE is the groundwater elevation, RPE is the reference point elevation, and DTW is the
1181 depth to water. When available, barometric pressure is also accounted for in the depth to water
1182 calculation.

1183 In cases where the official RPE is a concrete pedestal, but the hand soundings are referenced
1184 off the top of a sounding tube, the measured DTW is adjusted by subtracting the sounding tube
1185 offset from the top of the pedestal.

1186 All groundwater level measurements must include a record of the date, well identifier, time
1187 (in 24-hour military format), RPE, DTW, GWE, and comments regarding factors which may
1188 influence the recorded measurement such as nearby production wells pumping, weather,
1189 flooding, or well condition.

1190 **Manual Groundwater Level Measurement**

1191 Groundwater level data collected by an in-person field crew will follow the following general
1192 protocols:

- 1193 • Prior to sample collection, all sampling equipment and the sampling port must be
1194 cleaned.
- 1195 • Manual groundwater level measurements are made with electronic sounders or steel
1196 tape. Electronic sounders consist of a long, graduated wire equipped with a weighted
1197 electric sensor. When the sensor is lowered into water, a circuit is completed and an
1198 audible beep is produced, at which point the sampler will record the depth to water.
1199 Some production wells may have lubricating oil floating on the top of the water column,
1200 in which case electric sounders will be ineffective. In this circumstance steel tape may be
1201 used. Steel tape instruments consist of simple graduated lines where the end of the line
1202 is chalked to indicate depth to water without interference from floating oil.
- 1203 • All equipment is used following manufacturer specifications for procedure and
1204 maintenance.
- 1205 • Measurements must be taken in wells that have not been subject to recent pumping. At
1206 least 2 hours of recovery must be allowed before a hand sounding is taken.
- 1207 • For each well, multiple measurements are collected to ensure the well has reached
1208 equilibrium such that no significant changes in groundwater level are observed.
- 1209 • Equipment is sanitized between well locations to prevent contamination and maintain the
1210 accuracy of concurrent groundwater quality sampling.

1211 **Data Logger Groundwater Level Measurement**

1212 Telemetry equipment and data loggers can be installed at individual wells to record continuous
1213 water level data, which is then remotely collected via satellite to a central database and
1214 accessed on the Sierra Valley Database Portal in a web browser. Installation and use of data
1215 loggers must abide by the following protocols:

- 1216 • Prior to installation the sampler uses an electronic sounder or steel tape to measure and
1217 calculate the current groundwater level to properly install and calibrate the transducer.
1218 This is done following the protocols listed above.

- 1219 • All data logger installations follow manufacturer specifications for installation, calibration,
1220 data logging intervals, battery life, and anticipated life expectancy.
- 1221 • Data loggers are set to record only measured groundwater level to conserve data
1222 capacity; groundwater elevation is calculated later after downloading.
- 1223 • In any log or recorded datasheet, site photographs, the well ID, transducer ID,
1224 transducer range, transducer accuracy, and cable serial number are all recorded.
- 1225 • The field staff notes whether the pressure transducer uses a vented or non-vented cable
1226 for barometric compensation. If non-vented units are used, data are properly corrected
1227 for natural barometric pressure changes.
- 1228 • All data logger cables are secured to the well head with a well dock or another reliable
1229 method. This cable is marked at the elevation of the reference point to allow estimates of
1230 future cable slippage.
- 1231 • Data logger data is periodically checked against hand measured groundwater levels to
1232 monitor electronic drift, highlight cable movement, and ensure the data logger is
1233 operating correctly. This check occurs at least annually, typically during routine site
1234 visits.
- 1235 • For wells not connected to a supervisory control and data acquisition (SCADA) system,
1236 transducer data is downloaded as necessary to ensure no data is overwritten or lost.
1237 Data is entered into the data management system as soon as possible. When the
1238 transducer data is successfully downloaded and stored, the data is deleted or
1239 overwritten to ensure adequate data logger memory.

1240 **3.4.1.2 Groundwater Storage Monitoring Network**

1241 Groundwater level is used as a proxy for groundwater storage (**Section 3.3.1.6.1**) and therefore
1242 the groundwater storage monitoring network is identical to the network for groundwater level.
1243 Observations obtained at the groundwater level monitoring network will directly inform
1244 integrated surface and groundwater modeling in the subbasin as model calibration targets.

1245 **3.4.1.3 Groundwater Quality Monitoring Network**

1246 The objective of the groundwater quality monitoring network design is to capture sufficient
1247 spatial and temporal detail to understand groundwater quality in the Subbasin. The purpose is
1248 also to adequately monitor groundwater conditions for all beneficial uses. The data from the
1249 network will provide an ongoing water quality record for future assessments of groundwater
1250 quality. The spatial and temporal coverage of the network is designed to allow the GSAs to take
1251 an effective and efficient adaptive management approach in protecting groundwater quality, to
1252 minimize the risk for exceeding maximum water quality thresholds, to support the GSAs in
1253 implementing timely projects and actions, and ultimately, to contribute to compliance with water
1254 quality objectives throughout the Subbasin.

1255 Existing wells used to monitor groundwater quality in the Subbasin are primarily located within
1256 and near the semi-urban areas of the Subbasin. Additionally, members of the community
1257 volunteered eight wells to potentially be included in the network; these volunteered wells do not
1258 have a historical record of water quality data. There are data gaps in the Subbasin regarding the
1259 spatial and temporal distribution of groundwater quality data. For this reason, up to five new
1260 monitoring wells may be installed as part of the network. If necessary, these new wells will be
1261 incorporated into the network to improve spatial coverage of the Subbasin; one additional well
1262 installed by DWR will also be incorporated into the network.

1263 The monitoring network will use existing programs in the Subbasin that already monitor for
1264 specific constituents of concern for which SMCs are set (nitrate and TDS), and from other
1265 programs where these constituents could be added as part of routine monitoring efforts in
1266 support of the GSP. Coordination will be conducted between existing monitoring programs and
1267 the GSAs to develop an agreement for data collection responsibilities, monitoring protocols, and
1268 data reporting. Samples for nitrate, TDS, arsenic, boron, and pH will be collected at least
1269 **annually** from each well in the water quality network. To prevent bias associated with date of
1270 sample collection, all samples should be collected on approximately the **same date (i.e.,**
1271 **+/- 30 days of each other) each year**. Groundwater quality samples will be collected and
1272 analyzed in accordance with the monitoring protocols outlined in below.

1273 Using the geographic location of wells with historic groundwater quality records (June 1990 –
1274 July 2020), an initial list of wells with groundwater quality measurements was created for
1275 inclusion in the monitoring network. Water quality monitoring well locations were then reviewed
1276 to assess the spatial coverage obtained from the network. Information on the screened interval
1277 and well depth was scarce. This data gap will be addressed through further investigation of well
1278 completion reports and use of well video logs. Spatial data gaps, and potentially inadequate
1279 vertical coverage, will be addressed through the installation of new wells. Additionally, future
1280 project and management actions outlined in **Chapter 4** will be implemented to refine the water
1281 quality network as needed.

1282 The initial list of groundwater quality monitoring wells was created using data downloaded from
1283 the California Groundwater Ambient Monitoring and Assessment (GAMA) Program Database,
1284 which for the Sierra Valley Subbasin includes water quality information collected by the following
1285 agencies:

- 1286 • Department of Water Resources (DWR)
- 1287 • State Water Board, Division of Drinking Water public supply well water quality (DDW)
- 1288 • State and Regional Water Board Regulatory Programs (Electronic Deliverable Format
1289 (EDF) and Irrigated Agricultural Land Waiver (AGLAND))
- 1290 • U.S. Geological Survey (USGS)

1291 Evaluating these data, the initial list of groundwater quality monitoring wells includes 53 wells
1292 with historical data for both nitrate and TDS. To further narrow down the number of wells, the
1293 following criteria were considered (it is noted criteria were relaxed in some instances so as to
1294 provide better spatial coverage):

- 1295 • Both nitrate and TDS measured at the same well;
- 1296 • Measured water quality data are available at least through 2019; and,
- 1297 • The well has at least two historical measurements.

1298 Wells that met this criterion were then narrowed down to avoid inclusion of redundant
1299 monitoring wells that were within proximity to each other. As shown in **Figure 3.4.1-2** and
1300 **Table 3.4.1-2**, the final network includes 17 GAMA wells for potential inclusion in the network.
1301 While there is no definitive rule for the appropriate density of groundwater quality monitoring
1302 points needed in a basin, Sophocleous (1983) estimates 6.3 monitoring wells are needed per
1303 100 square miles to adequately monitor groundwater levels in a basin, resulting in an estimated
1304 12.3 monitoring wells needed in the SV subbasin (Sophocleous, 1983; DWR, 2016). Based on
1305 Sophocleous (1983), 13 wells are needed to monitor the subbasin's surface area of

1306 195.1 square miles; equivalent to a lateral coverage of 15.0 square miles per well, or radius of
1307 2.2 miles per well.

1308 **Table 3.4.1-2. Potential GAMA Wells to be added to the Groundwater Quality Monitoring Network**
1309 **(Measurement period 1990-2020)**

Well ID	Well Type (Owner)	Nitrate Measurements			TDS Measurements			Logic For Selection
		From	To	# of Records	From	To	# of Records	
21N14E15J001M	Unknown	10/30/07	10/30/07	1	12/7/99	10/30/07	2	Spatial
21N14E32G001M	Ag	10/30/07	10/30/07	1	12/7/99	10/30/07	2	Spatial
21N15E05D001M	Unknown	10/30/07	10/30/07	1	12/8/99	10/30/07	2	Spatial
22N15E21K001M	Unknown	10/31/07	10/31/07	1	10/31/07	10/31/07	1	Spatial
22N15E35H001M	Unknown	10/31/07	10/31/07	1	10/31/07	10/31/07	1	Spatial
3200020-001	Municipal (Caltrans Reststop)	4/16/96	5/19/20	20	-	-	-	Monitoring Record
3200138-001	Municipal (Meadow Edge Park)	12/1/92	6/9/20	20	12/1/92	8/20/19	6	Monitoring Record
3200171-001	Municipal (Sierra Valley RV Park)	11/28/95	8/20/19	15	-	-	-	Spatial
3200193-001	Municipal (Plumas National Forest; Nervino)	6/23/11	6/18/19	8	6/23/11	6/23/11	1	Spatial
3200618-002	Municipal	12/18/01	5/5/20	11	6/11/12	6/11/12	1	Spatial
4600003-001	Municipal (Treasure Mountain Camp)	6/6/95	7/17/19	21	-	-	-	Monitoring Record
4600009-002	Municipal (Sierra CSA #5, Sierra Brooks)	9/1/90	7/6/20	19	9/1/90	4/23/14	6	Monitoring Record
4600037-001	Municipal (New Age Church of Being, Sierraville)	6/27/95	6/8/20	19	-	-	-	Monitoring Record
4600083-001	Municipal	12/5/95	4/3/07	11	12/15/94	7/6/00	3	Spatial
4600092-001	Municipal	7/6/00	4/3/07	4	-	-	-	Spatial
4610001-002	Municipal (City of Loyalton)	5/5/92	12/18/17	13	5/5/92	12/18/17	4	Monitoring Record



Well ID	Well Type (Owner)	Nitrate Measurements			TDS Measurements			Logic For Selection
		From	To	# of Records	From	To	# of Records	
4610001-004	Municipal (Loyalton High School)	5/5/92	1/15/19	18	5/5/92	12/18/17	5	Monitoring Record



1310

Figure 3.4.1-2. Potential Wells for Inclusion in the Groundwater Quality Monitoring Network

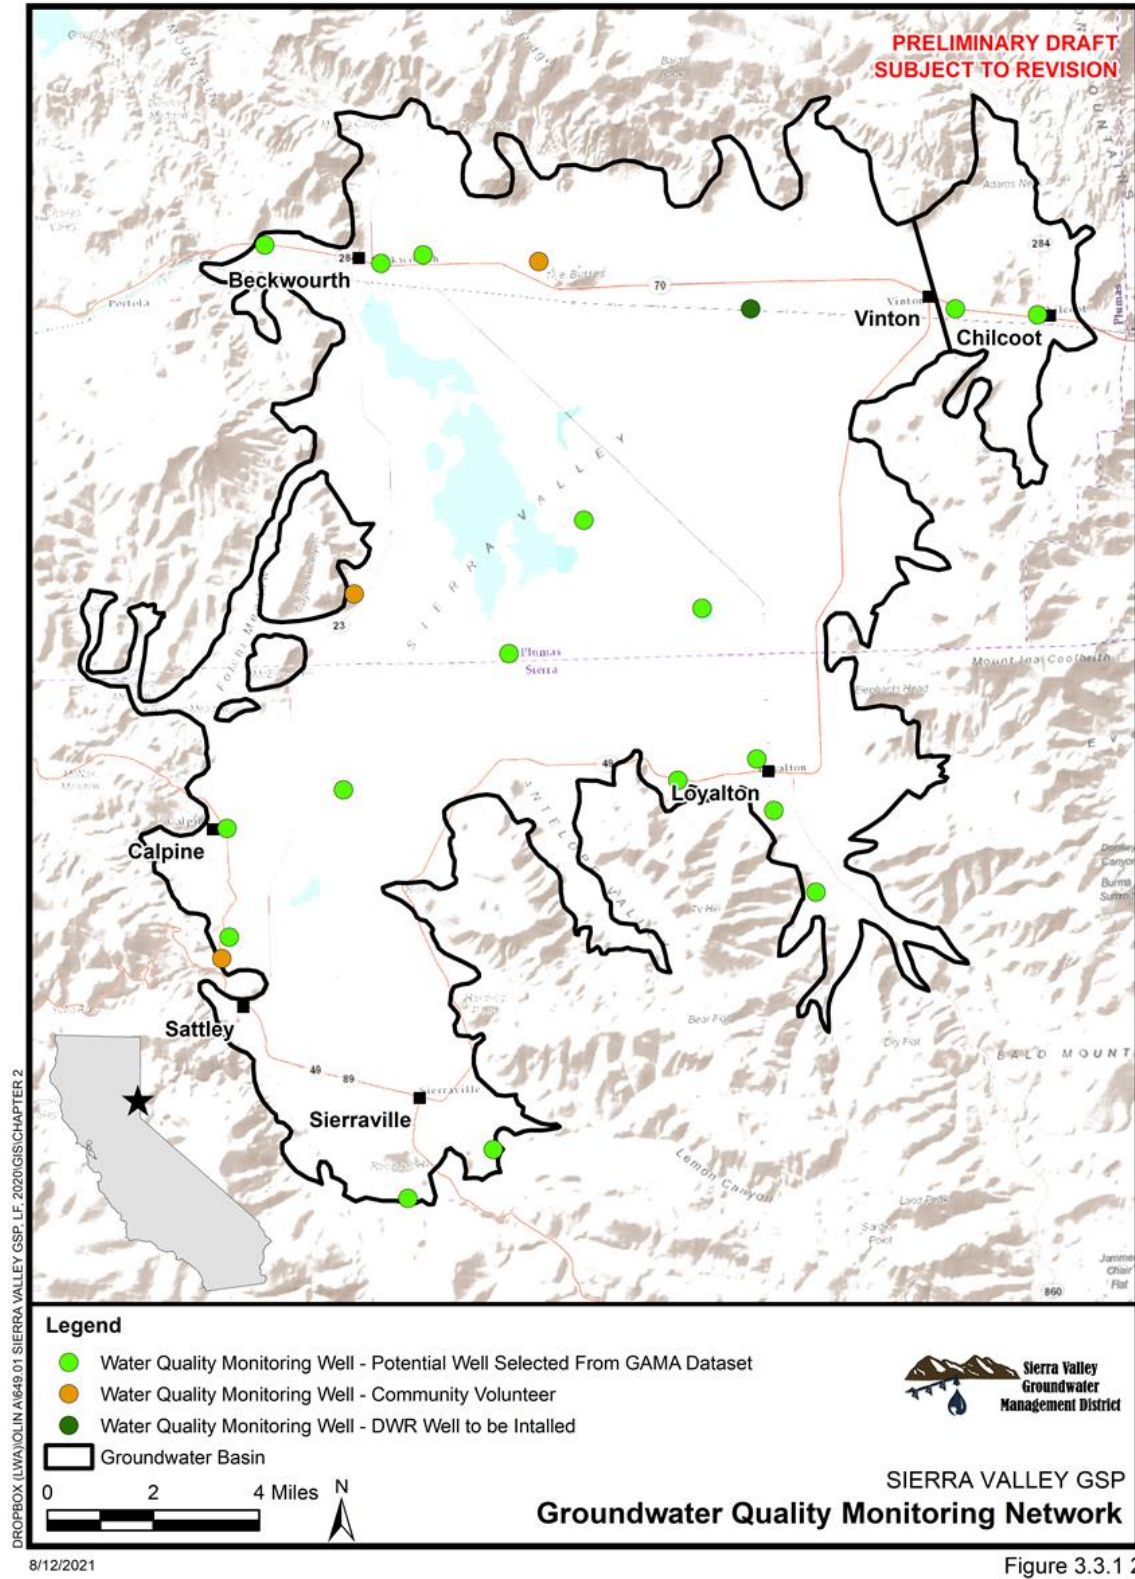


Figure 3.3.1.2

1311 *3.4.1.3.1 Monitoring Protocols for Data Collection and Monitoring (Reg. § 352.2)*

1312 Sample collection will follow the USGS National Field Manual for the Collection of Water Quality
1313 Data (USGS 2015) and Standard Methods for the Examination of Water and Wastewater (Rice
1314 et al., 2012), as applicable, in addition to the general sampling protocols listed below.

1315 The following section provides a summary of monitoring protocols for sample collection and
1316 analytical testing for evaluation of groundwater quality. Establishment of and adherence to these
1317 protocols will ensure that data collected for groundwater quality are accurate, representative,
1318 reproducible, and contain all required information. All sample collection and testing for water
1319 quality in support of this GSP are required to follow the established protocols for consistency
1320 throughout the Subbasin and over time. All testing of groundwater quality samples will be
1321 conducted by laboratories with certification under the California Environmental Laboratory
1322 Accreditation Program (ELAP). These monitoring protocols will be updated as necessary and
1323 will be re-evaluated every 5 years.

1324 Wells used for sampling are required to have a distinct identifier, which must be located on the
1325 well housing or casing. This identifier will also be included on the sample container label to
1326 ensure traceability.

1327 Event Preparation:

- 1328 • Before the sampling event, coordination with any laboratory used for sample analysis is
1329 required. Pre-sampling event coordination must include the scheduling of the laboratory
1330 for sample testing and a review of the applicable sample holding times and preservation
1331 requirements that must be observed.
- 1332 • Sample labels must include the sample ID, well ID, sample date and time, personnel
1333 responsible for sample collection, any preservative in the sample container, the analyte
1334 to be analyzed, and the analytical method to be used. Sample containers may be
1335 labelled prior to or during the sampling event.

1336 Sample Collection and Analysis:

- 1337 • Sample collection must occur at, or close to, the wellhead for wells with dedicated
1338 pumps and may not be collected after any treatment, from tanks, or after the water has
1339 travelled through long pipes. Prior to sample collection, the sample collector should
1340 clean all sampling equipment and the sampling port. The sampling equipment must also
1341 be cleaned prior to use at each new sample location or well.
- 1342 • Sample collection in wells with low-flow or passive sampling equipment must follow
1343 protocols outlined in the EPA's Low-flow (minimal drawdown) ground-water sampling
1344 procedures (Puls and Barcelona, 1996) and USGS Fact Sheet 088-00 (USGS, 2000),
1345 respectively. Prior to sample collection in wells without low-flow or passive sampling
1346 equipment, at least three well casing volumes should be purged prior to sample
1347 collection to make sure ambient water is being tested. The sample collector should use
1348 best professional judgement to ensure that the sample is representative of ambient
1349 groundwater. If a well goes dry, this should be noted, and the well should be allowed to
1350 return to at least 90% of the original level before a sample is collected.
- 1351 • Sample collection should be completed under laminar flow conditions.
- 1352 • Samples must be collected in accordance with appropriate guidance and standards and
1353 should meet specifications for the specific constituent analyzed and associated data
1354 quality objectives.

- 1355 • In addition to sample collection for the target analyte (e.g., nitrate), field parameters,
1356 including temperature, pH, and specific conductivity, must be collected at every site
1357 during well purging. Field parameters should stabilize before being recorded and before
1358 samples are collected. Field instruments must be calibrated daily and checked for drift
1359 throughout the day.
- 1360 • Samples should be chilled and maintained at a temperature of 4° C and maintained at
1361 this temperature through delivery to the laboratory responsible for analysis.
- 1362 • Chain of custody forms are required for all sample collection and must be delivered to
1363 the laboratory responsible for analysis of the samples to ensure that samples are tested
1364 within applicable holding limits.
- 1365 • Laboratories must use reporting limits that are equivalent, or less than, applicable data
1366 quality objectives.

1367 **3.4.1.4 Depletions of Interconnected Surface Water Monitoring Network**

1368 The ISW depletion monitoring network, shown in **Figure 3.4.1-3**, is developed to document
1369 streamflow and hydraulic gradients within Sierra Valley and incorporates groundwater level
1370 RMPs, and monitoring sites for streamflow, and stream stage. The combination of these
1371 monitoring networks will allow for a better understanding of the surface-groundwater
1372 interactions, enable calculation of streamflow depletion and its spatial and temporal distribution,
1373 and will provide important context for understanding the potential effects of pumping on surface
1374 water that is critical for beneficial users. To evaluate the potential impacts of groundwater
1375 pumping on surface water depletion, groundwater level, stream stage, and streamflow
1376 conditions will be documented over time at representative monitoring points.

1377 ISW depletion monitoring in the Sierra Valley will involve two approaches: 1) measuring
1378 relatively shallow groundwater and its relationship to surface water elevation ('stage') for
1379 calculation of hydraulic gradients between streams and groundwater, and 2) monitoring
1380 streamflow. As described in **subsection 3.3.3.4.1**, stage data are not currently being collected,
1381 so groundwater levels are proposed as a proxy for hydraulic gradients, and by extension, for
1382 ISW depletion, until surface water monitoring stations can be established. Similarly, the
1383 absence of near-continuous streamflow gaging stations prevents direct measurement of
1384 streamflow changes due to pumping under current conditions. The shallow groundwater
1385 monitoring network will therefore initially consist of existing wells which are screened at shallow
1386 depths (**Table 3.3.3-1**), some of which are also included in the groundwater level monitoring
1387 network.

1388 Strategically located new wells and stream stage and/or streamflow monitoring stations are also
1389 proposed as discussed further in Chapter 4 (Projects and Management Actions) and Chapter 5
1390 (GSP Implementation), so that each ISW RMP located in **Figure 3.3.3-1** consists of a coupled
1391 surface water and shallow groundwater monitoring station for eventual calculation and tracking
1392 of hydraulic gradients in the vicinity of representative ISWs. The proposed new wells are
1393 intended to address shallow groundwater level data gaps, and provide coverage where
1394 groundwater level declines due to pumping have been documented. This information, used in
1395 conjunction with the basin groundwater model, will allow for a spatial and temporal quantification
1396 of ISW depletion.

1397

Table 3.4.1-3. Proposed stream stage gages and coupled wells to monitor ISW depletion

Stream Stage Gage	General Location	Coupled Well
Middle Fork Feather River	At Marble Hot Springs Road	RMP ID 106 (22N15E17H001M) if active or a proposed new well in a similar location
Middle Fork Feather River (Flow also measured here)	Downstream of Little Last Chance Creek confluence	RMP ID 161 (23N14E35L001M) and RMP ID 301 (DMW 6s)
Smithneck Creek	Between Highway 49 and Poole Lane	RMP ID 73 (21N16E18G002M) and RMP ID 37 (DMW 1s)
Central Wetland Complex	West of Harriet Lane south of Dyson Lane	Proposed new shallow well 1
Sierra Valley Channels	West of Highway 49 near Rice Hill	RMP ID 31 (21N14E25P003M) and RMP ID 294 (DMW 3s)
Carman Creek	Near Westside Road	RMP ID 297 (DMW 4s)
Hamlin Creek (Flow also measured here)	South of Willow Street on Forest Service Road 54020	RMP ID 291 (DMW 2s)
Cold Stream (Flow also measured here)	Downstream of Bonta Creek and upstream of diversions	RMP ID 12 (20N14E14R001M)
East Channel LLC Creek	At Sierra Valley Mc Nella Lane	Proposed new shallow well 1
East Channel LLC Creek	East of Roberti Ranch Road	RMP ID 364 (DMW 7s)
North Channel LLC Creek	South of Highway 70 near The Buttes	RMP 176 (23N15E34D001M)
Little Last Chance Creek East and West Branches (Flow also measured here)	At Highway 70	Proposed new shallow well 2, RMP ID 209 (23N16E36N002M), and RMP 300 (DMW 5s)

1398 In addition to shallow groundwater and surface water stage monitoring, near-continuous
 1399 recording streamflow gages are an integral part of the ISW depletion monitoring program.
 1400 Streams and numerous diversion ditches are vast, and in-situ monitoring of every ISW and GDE
 1401 extent is impractical. Therefore continuous streamflow monitoring gages are proposed as
 1402 upgrades to the existing DWR streamflow monitoring stations (i.e., where major tributaries enter
 1403 the Basin), and at select locations where flow concentrates. This approach captures much of the
 1404 flow entering the basin and can be used to calibrate modeled estimates of total surface inflows,
 1405 as well as depletion estimates as these streams cross the valley floor. Final locations of
 1406 proposed wells, streamflow stages, and streamflow gages will be determined by a site suitability
 1407 study, where physical characteristics of the stream and site accessibility will be evaluated.

1408

Table 3.4.1-4. Proposed streamflow gages to monitor ISW depletion


Streamflow Gage	General Location	Notes
Little Last Chance Creek East and West Branches	At Highway 70	Two existing but inactive DWR gaging stations exist here and would be reoccupied and upgraded
Smithneck Creek	Upstream of Loyalton	Watermaster streamflow monitoring site would be upgraded to a near-continuous recording gaging station
Fletcher Creek	West of Calpine	Watermaster streamflow monitoring site would be upgraded to a near-continuous recording gaging station
Turner Creek	Northwest of Sattley	Watermaster streamflow monitoring site would be upgraded to a near-continuous recording gaging station
Berry (Miller) Creek	West of Highway 49 in Wild Bill Canyon	Watermaster streamflow monitoring site would be upgraded to a near-continuous recording gaging station
Hamlin Creek	South of Willow Street on Forest Service Road 54020	Watermaster streamflow monitoring site would be upgraded to a near-continuous recording gaging station
Cold Stream	Downstream of Bonta Creek and upstream of diversions	This would combine the Bonta (Webber) Creek stations to one station below the confluence of the two creeks, provided that this would not interfere with Little Truckee Diversion operations.
Lemon Creek	At Lemon Canyon Road (650)	Watermaster streamflow monitoring site would be upgraded to a near-continuous recording gaging station
Middle Fork Feather River	Downstream of Little Last Chance Creek confluence	Watermaster streamflow monitoring site would be upgraded to a near-continuous recording gaging station

1409 Data collected from the monitoring network will allow for evaluation of minimum thresholds and
 1410 undesirable results and whether adjustments will be needed at the five year GSP review. After
 1411 this initial five years of GSP implementation, the use of groundwater levels and hydraulic
 1412 gradients as a proxy for surface water depletion will also be reevaluated to determine if the
 1413 approach is a beneficial addition to direct streamflow measurements and still an appropriate
 1414 metric for the sustainability indicator. Minimum thresholds and measurable objectives will be
 1415 reviewed and adjustments will be made as needed.

1416

1417
1418
1419

Figure 3.4.1-3. Existing and proposed ISW monitoring locations for flow, stage, and groundwater level are shown alongside ISW characterization at prominent surface water bodies

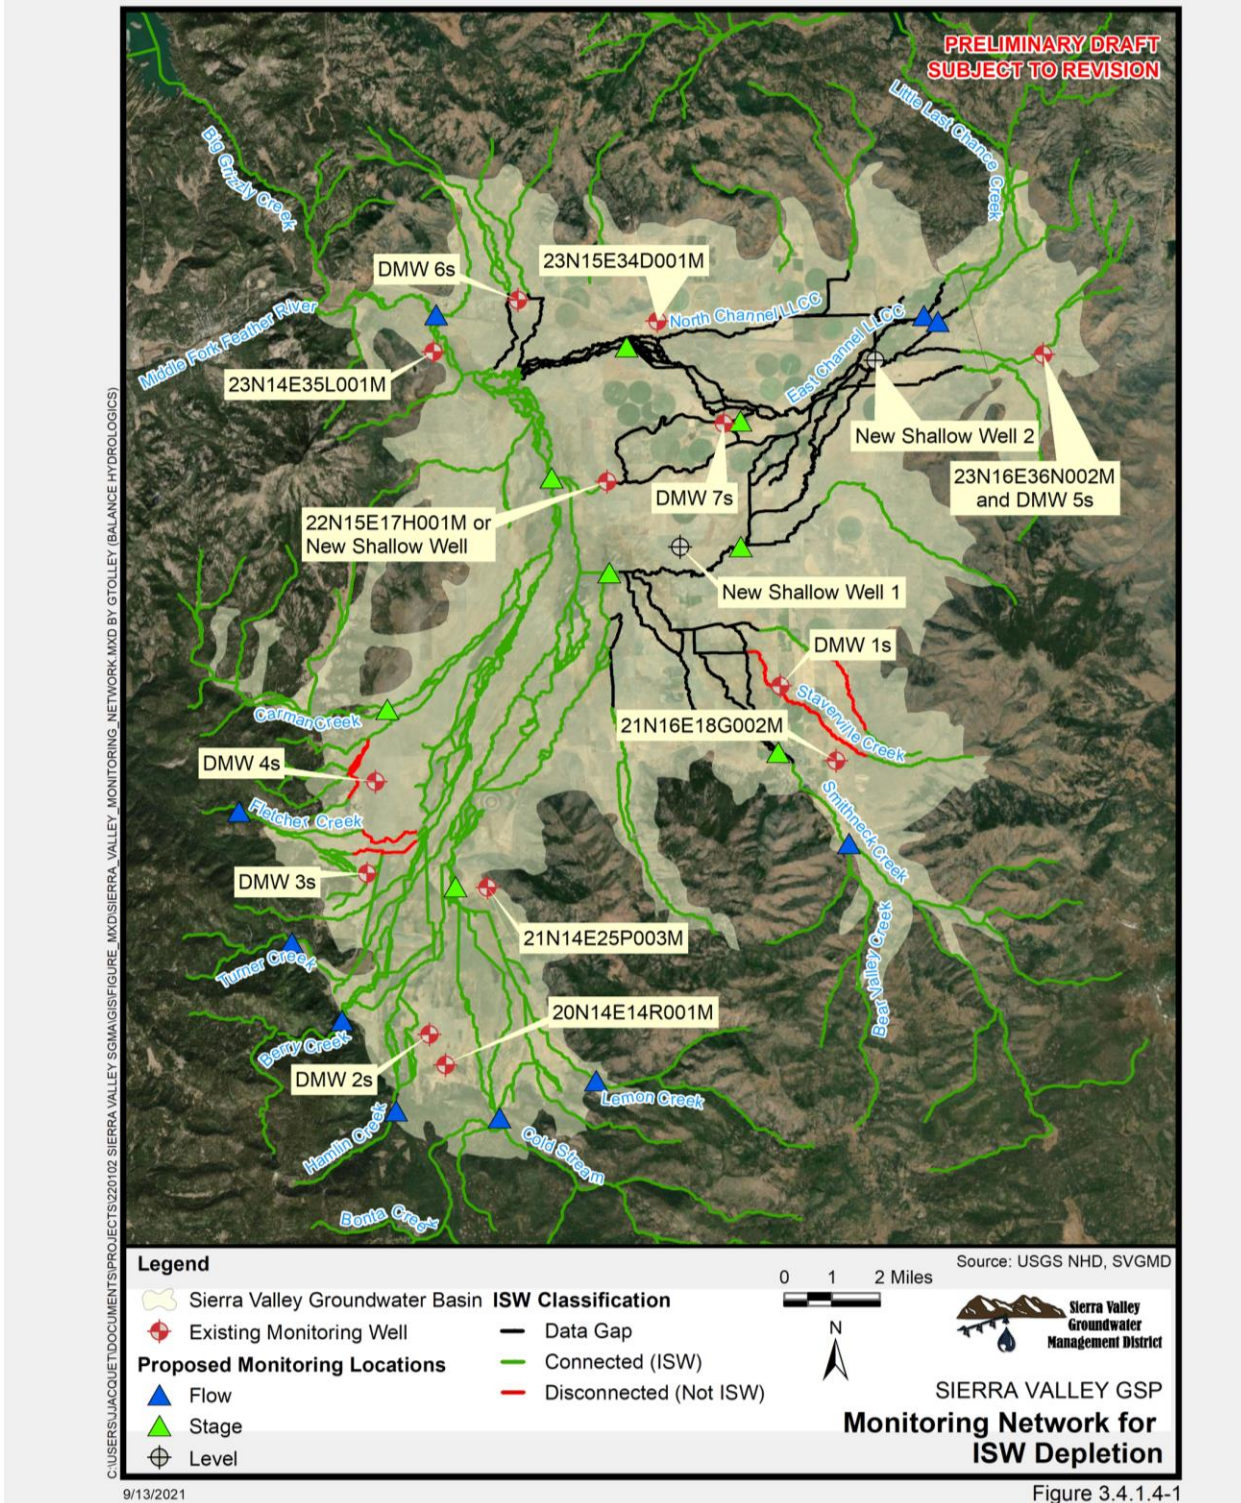

1420
1421

1422 3.4.1.4.1 *Protocols for Data Collection and Monitoring (23 CCR § 352.2)*

1423 **Groundwater Level Measurement**

1424 See **subsection 3.4.1.1.1** for protocols for monitoring of groundwater levels.

1425 **Measurement of Continuous Stage and Streamflow**

- 1426 • Stream-gaging practices will follow the procedures used by the USGS, as outlined by
1427 Carter and Davidian (1968).
- 1428 • Installation of streamflow gages will be based on reach specific characteristics and
1429 ideally located upstream of a natural or constructed grade control to maintain the
1430 relationship between stage and streamflow.
- 1431 • Installation and instrumentation will include a ‘Style C’ staff plate that displays stage
1432 in decimal feet and is secured to a wood or metal post driven into the bed of the
1433 stream. A near-continuous water level logger will accompany the staff plate and will
1434 measure water depths in 15-minute intervals. If an unvented logger is used, a
1435 barometer will need to be installed at one of the stream gaging locations to
1436 compensate data for changing barometric pressure
- 1437 • Flow will be measured a minimum of 5 times annually over a range of different water
1438 depths (‘stages’).
- 1439 • Based on these periodic site visits where staff plate readings and streamflow
1440 measurements are made, an empirical stage-to-discharge relationship will be developed
1441 and adjusted over time for each station, also referred to as a stage-discharge “rating
1442 curve.” The rating curve will be used to convert the continuous-logging record of stage to
1443 flow.
- 1444 • The data will be analyzed, and if necessary, stage shifts will be applied to account for
1445 local scour and fill during the monitoring period, and the effects of leaf and debris dams
1446 during low flows, or effects of snow and ice in the winter.

1447 **3.4.1.5 Subsidence Monitoring Network**

1448 As per 23 CCR § 354.36(b), this GSP adopts groundwater elevations as a proxy for monitoring
1449 changes in groundwater in land subsidence, **and consistent with the observation that**
1450 **groundwater levels maintained above MTs also prevent significant and unreasonable land**
1451 **subsidence (this needs to be adjusted after input from the TAC).** Groundwater levels are the
1452 only long-term measure of land subsidence for the Subbasin at the time of writing. Poland and
1453 Davis (1969) report the land subsidence to groundwater level decline ratio as approximately
1454 0.01 to 0.2 foot of subsidence per foot of groundwater level decline. These land subsidence
1455 SMC will be augmented by InSAR based land elevation change, and ground-based surveys.
1456 Throughout the GSP implementation period, the relationship between the change in
1457 groundwater levels and the change in the amount land subsidence (factoring in that total land
1458 subsidence is a composite of elastic and inelastic land subsidence) will be developed.

1459 Management areas are not planned for this GSP at this time. The monitoring network applies to
1460 the entire Subbasin area.

1461 3.4.1.5.1 *Monitoring Protocols for Data Collection and Monitoring for Land Subsidence*
1462 *Sustainability Indicator (Reg. § 352.2)*

1463 As groundwater elevation measurements are to be used as a proxy for inelastic land
1464 subsidence in this GSP, the monitoring network for the land subsidence sustainability indicator

1465 is the same as the groundwater level monitoring network. The protocols used for the
1466 groundwater level monitoring network described in **Subsection 3.4.1.1** are the same for the
1467 land subsidence monitoring network.

1468 Four (4) monument-based land surface elevation stations will be installed within the primary
1469 geographic area where subsidence is documented by DWR from InSAR data processing for
1470 2015-2019. The subsidence monument placements will also be developed in consideration of
1471 geologic discontinuities, such as the Grizzly Valley Fault Zone. At these geologic
1472 discontinuities, there is the greatest potential for differential subsidence, which is normally the
1473 most damaging to structures and improvements such as roads or underground utilities.

1474 A licensed Professional Surveyor in the state of California will install the monuments. The
1475 monuments will be a deep rod construction type applicable to soils and land surface conditions
1476 at installation locations. Monument installation will follow industry guidelines for vertical control
1477 monument installation as documented in the US Army Corps of Engineers Guidance Document
1478 EM 1110-1-1002, (USACE, March 2012). Monument vertical elevations will be measured
1479 annually using survey-grade GPS technology, with vertical resolution of 0.05 ft, with elevations
1480 reported as feet above sea level using a standardized datum. Initial elevation measurements will
1481 be made at least 28 days after installation.

1482 The monument elevations will be used to gauge the accuracy of future InSAR data processing,
1483 and to calibrate the processing if needed. The data monument-based measurements may
1484 enable differentiation of inelastic and elastic components of land subsidence, if monuments are
1485 located near to monitoring well locations where depth to groundwater levels are being measured
1486 and some variance in depths to groundwater up and down is recorded (rebound in groundwater
1487 levels can be associated with rebound, or lack thereof, in land surface).

1488 *3.4.1.5.2 Representative Monitoring for Land Subsidence Sustainability Indicator*
1489 *(Reg. § 354.36)*

1490 As groundwater elevation measurements are to be used as a proxy for inelastic land
1491 subsidence in this GSP, the monitoring network for the land subsidence sustainability indicator
1492 is the same as the groundwater level monitoring network. Therefore, the representative
1493 monitoring sites within the groundwater elevation monitoring network, discussed in detail in
1494 **Subsection 3.4.1.1**, are identical to the monitoring network for the land subsidence
1495 sustainability indicator.

1496 *3.4.1.5.3 Assessment and Improvement of Monitoring Network for Land Subsidence*
1497 *Sustainability Indicator (Reg. § 354.38)*

1498 As groundwater elevation measurements are to be used as a proxy for inelastic land
1499 subsidence in this GSP, the monitoring network for the land subsidence sustainability indicator
1500 is the same as the groundwater level monitoring network discussed in detail in
1501 **Subsection 3.4.1.1**.

1502 InSAR and ground-based elevation surveys will augment groundwater level measurements and
1503 contribute towards improved understanding of land subsidence in the basin. Pending results
1504 from these analyses, the monitoring network may be improved in the five-year plan update.

1505 **3.4.2 Assessment and Improvement of the Monitoring Network (23 CCR § 354.38)**

1506 The GSP and each five-year assessment report will include an evaluation of the monitoring
1507 networks, including a determination of uncertainty and whether there are data gaps that could
1508 affect the ability of the Plan to achieve the sustainability goal for the Subbasin. Evaluation of
1509 data gaps must consider whether the spatial and temporal coverage of data is sufficient and
1510 whether monitoring sites provide reliable and representative data. The description of identified

1511 data gaps will include the location and basis for determining data gaps in the monitoring network
1512 as well as local issues and circumstances that limit or prevent monitoring. These data gaps will
1513 be addressed by describing steps that will be taken to fill data gaps before the next five-year
1514 assessment, including the location and purpose of newly added or installed monitoring sites.

1515 **3.4.3 Reporting Monitoring Data to the Department (23 CCR § 354.40, § 352.4)**

1516 Monitoring data will be stored in the data management system and a copy of the monitoring
1517 data will be included in each Annual Report submitted electronically to DWR. All reporting
1518 standards and information shall follow the guidelines outlined in 23 CCR § 352.4.

1519 **3.4.4 Monitoring Networks Summary**

1520 The SMC monitoring networks were developed leveraging current and ongoing monitoring to
1521 assess minimum thresholds. A summary of the existing and proposed expansion of the
1522 monitoring networks is presented in **Table 3.4.4-1**.

1523 **3.4.4.1 Groundwater level and storage**

1524 The groundwater levels monitoring network combined with the current DWR CASGEM network
1525 serves as basis for assessing all SMCs with the exception of water quality. All 36 wells that
1526 have been selected for the immediate levels monitoring network, which cover discreet locations
1527 as well as shallow, medium and deep levels of the aquifer, are either existing SVGMD
1528 monitoring wells that are currently monitored by SVGMD or wells included in the CASGEM
1529 network and monitored by DWR twice per year. The current minimum monitoring frequency of
1530 twice each year (spring and fall) is retained for the well included in the CASGEM network. For
1531 the district wells, a minimum of 2x/year is suggested for all the wells, with a subset of wells
1532 monitored more frequently during the irrigation season (already ongoing with the current
1533 monitoring effort). Two of multi-completion DWR wells recently installed include pressure
1534 transducers for continuous monitoring. If funding is secured, level sensors and telemetry could
1535 be added to a subset of the wells to enhance the frequency of monitoring and remove the need
1536 for monitoring site visits. Groundwater storage uses the levels monitoring network as a proxy
1537 and has no additional requirements.

1538 **3.4.4.2 Groundwater quality**

1539 The 17 existing wells selected for the water quality monitoring network are part of the GAMA
1540 system. They are regularly monitored as municipal wells, but the frequency varies. The program
1541 seeks to augment the GAMA wells with six additional wells (five existing and one monitoring
1542 well currently being installed by DWR), for additional coverage in areas where septic tanks may
1543 affect groundwater quality and where boron and arsenic may create future problems. For the 6
1544 new wells, TDS, Nitrate, Boron and Arsenic will be monitored twice per year. The results will be
1545 complemented with the ongoing monitoring undertaken by public health for the municipal wells.
1546 The monitoring plan will be augmented as needed if constituents will exceed the criteria or if
1547 specific increasing trends in the constituents concentration are observed.

1548 **3.4.4.3 Interconnected surface water and GDEs**

1549 The interconnected surface water monitoring network is initially a subset of the existing shallow
1550 groundwater levels monitoring network and will assess impacts strictly through water levels. The
1551 near-term addition to this initial network is to instrument at least 4 shallow existing wells located
1552 near ISW and GDE with continuous pressure transducers. Cost for transducers and installation
1553 is covered through the existing planning and implementation grant. An initial PMA is then
1554 suggested to evaluate possible locations and design of up to ten stream flow gauges and up to
1555 eight stream stage gauges to be paired with the continuous groundwater measurements. As

1556 projects are developed within the basin that may benefit from and provide funding for the
1557 gauges, they will be added to the monitoring network.

1558 **3.4.4.4 Subsidence**

1559 In general, the groundwater level monitoring network serves as a proxy for the subsidence SMC
1560 across the SV Subbasin. As part of the existing GSP development grant, allocations have been
1561 made for installation of four monuments in the area with observed subsidence. SVGMD will fund
1562 periodic surveying of these monuments to determine if they are holding for vertical position.
1563 DWR will periodically provide InSAR data that will be analyzed and assessed with the
1564 groundwater levels and surveying of the monuments.

1565 [Figure showing well locations and who monitors them (SVGMD,DWR,etc) to be added]

1566 **Table 3.4.4-1. Summary of Existing and Proposed New Monitoring for Assessment of SMCs.**

SMC	Wells		Measurement		Other, based on future funding availability
	Existing	New	Existing	New	
Groundwater Levels	19 district wells 17 CASGEM wells	0	Measured at least 2x/year Measured at least 2x/year, but with continuous measurements in the latest multi-completion wells	(a)	N/A
Storage	Groundwater Levels as Proxy				N/A
Water Quality	17	Up to 6 (b)	1x/2 years (c)	(b)	N/A
ISW	13 shallow	4 (d)	13 at least quarterly and 4 continuously	(a)	Up to Ten stream flow gauges (e) and Eight stage gauges (e)
Subsidence	Groundwater Levels as Proxy for the first 2 years				Four new monuments (f) InSAR Data (g)

- 1567 (a) Telemetry may be employed to increase data collection frequency and minimize field
1568 visits.
- 1569 (b) Five community members have volunteered their wells for inclusion in the water quality
1570 monitoring network. DWR is installing one new observation well that can be used for both
1571 groundwater level and groundwater quality monitoring. If incorporated in the network, the
1572 wells would be monitored on the same frequency as existing wells
- 1573 (c) Coordinate with existing GAMA water quality monitoring to obtain data
- 1574 (d) 4 existing shallow wells will be considered for installation of continuous pressure
1575 transducers in the area near Groundwater Dependent Ecosystem. Funding for the
1576 instrumentation is already available through the implementation grant and there are
1577 opportunities for more external funding (e.g., from USGS/DWR project). Cost of
1578 maintaining these stations will be minimal and data are expected to be downloaded twice
1579 per year.
- 1580 (e) More continuous data in existing shallow wells may be considered in the future as
1581 implementation funding become available and as the model provides more certainty



- 1582 about locations where these data are critical. Shallow wells will be paired with flow and/or
1583 stage gauges, pending funding availability over the first 5 years of the implementation
1584 period. Feasibility study required to assess potential locations. Gauges may benefit by
1585 using telemetry to provide continuous data.
- (f) 1586 Funding currently allocated to install monuments. Future cost will include monuments
1587 surveying at least 1x/2 years.
- (g) 1588 InSAR data analyzed as it becomes available from DWR, but no more frequently than
1589 once every two years.

1590 **3.5 References**

- 1591 California Department of Water Resources (DWR). 2016. Best Management Practices for the
1592 Sustainable Management of Groundwater. Monitoring Network and Identification of Data Gaps.
1593 Sustainable Groundwater Management Program. December 2016. [https://water.ca.gov/-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-2-Monitoring-Networks-and-Identification-of-Data-Gaps_ay_19.pdf)
1594 [/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-2-Monitoring-Networks-and-Identification-of-Data-Gaps_ay_19.pdf)
1595 [Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-2-Monitoring-Networks-and-Identification-of-Data-Gaps_ay_19.pdf)
1596 [2-Monitoring-Networks-and-Identification-of-Data-Gaps_ay_19.pdf](https://water.ca.gov/-/media/DWR-Website/Web-Pages/Programs/Groundwater-Management/Sustainable-Groundwater-Management/Best-Management-Practices-and-Guidance-Documents/Files/BMP-2-Monitoring-Networks-and-Identification-of-Data-Gaps_ay_19.pdf)
- 1597 Harter, T., K. Dzurella, G. Kourakos, A. Hollander, A. Bell, N. Santos, Q. Hart, A. King, J. Quinn,
1598 G. Lampinen, D. Liptzin, T. Rosenstock, M. Zhang, G.S. Pettygrove, and T. Tomich, 2017. Nitro
1599 gen Fertilizer Loading to Groundwater in the Central Valley. Final Report to the Fertilizer
1600 Research Education Program, Projects 11-0301 and 150454, California Department of Food
1601 and Agriculture and University of California Davis, 333p., <http://groundwaternitrate.ucdavis.edu>
- 1602 Hopkins, J., 1994. Explanation of the Texas Water Development Board groundwater level
1603 monitoring program and water-level measuring manual: UM-52, 53 p.
1604 <http://www.twdb.texas.gov/groundwater/docs/UMs/UM-52.pdf>
- 1605 Smith R., Knight, R., Fendorf, S. 2018. Overpumping leads to California groundwater arsenic
1606 threat. Nature Communications. 9, Article number: 2089 (2018). June 5, 2018.
- 1607 Sophocleous, M., 1983. Groundwater observation network design for the Kansas groundwater
1608 management districts, USA: Journal of Hydrology, vol.61, pp 371-389.